

Installation



GEWISS

70 RT HP
Energy and safety. Everytime and everywhere.



ENERGY AND SAFETY. EVERYTIME AND EVERYWHERE.

PERFORMANCE

The switches of the 70 RT HP Series grant high performances thanks to the use of materials with a protection degree of IP66/IP67/IP69 and the optimization of wiring and installation times.

RELIABILITY

The heart of the offer is represented by the rotary switch disconnecter, which grants a complete reliability in isolating an electrical line/network. Designed to provide high electrical performances, the switch can operate with highly inductive motors (AC23A utilization category).



70 RT HP

70 RT HP is a complete offer of **rotary isolator switches** from 16A to 160A, available in **boxes both in insulating material and metal**, in control or emergency versions, compatible with the main applications for residential, tertiary and industrial contexts. DC versions for photovoltaic applications are also available from 16A to 40A in insulating box. The series is completed with **versions for board** from 16A to 800A and for **DIN rail** fixing from 16A to 63A, which can be equipped with auxiliary contacts. The devices have been designed to **reduce wiring time**, facilitate installation and **guarantee the maximum safety and robustness** even in the most demanding conditions.

Applications:

- Air conditioning system
- Lifts
- Photovoltaic applications
- Ventilation and vacuum system
- Technical rooms
- Industrial kitchens

SAFETY

The knobs of the 70 RT HP Series have been designed to resist even strong mechanical stresses. The innovative padlocking system, concealed within the switches, can only be operated using a tool, with space for up to 3 padlocks which can be locked in both ON and OFF positions (in the emergency version the switch can only be locked in the OFF position).

VERSATILITY

As well as surface-mounted versions, 70 RT HP is also available in a version for distribution boards: either front-panel installation or DIN rail assembly (EN50022). In this way, the products of the range are extremely flexible, as they can also be installed in all GEWISS distribution boards.



Versions in isolating box

TOTAL PROTECTION

The rotary isolators in plastic boxes have a protection degrees up to IP66/IP67/IP69, which guarantee a total protection of the products against dust and liquids, even in the case of high pressure and high temperature water jets. For this reason, 70 RT HP isolators are particularly suitable even in the most demanding environments.

QUICK ASSEMBLY

The front part of the 16-80A versions up to 4P is fixed with just 4 captive and lead sealable screws with a $\frac{1}{4}$ turn: a simple and innovative system which allows the front to be fixed or removed in a considerably reduced time, compared to any other system available on the market.

EASY INSTALLATION

There are many technical features to make the installation and the wiring easier: double metric entries (on the upper and lower sides), external points for wall fixing and a large internal space for routing the cables.



Versions in metal box

ROBUST AND RELIABLE

The metal box versions with protection up to IP66 are made in painted aluminium alloy, which offers high levels of performance over time, even in the most critical and heavy-duty conditions.

READY FOR USE

The metal box is pre-equipped with 4 external brackets for surface-mounting, maintaining the original IP rating even after installation. The bottom of the versions up to 80A is also supplied already drilled, ready to accept metric-pitch cable glands.

ATEX VERSIONS

The range is completed with the ATEX versions from 16A to 100A, compliant with Directive 2014/34/UE (which defines and regulates electrical systems in environments with potentially explosive atmospheres). The products of the range are available for 22D zones and complete the offer of GEWISS branded ATEX devices, which also includes control devices, junction boxes and lighting equipment.



DC versions for photovoltaic applications


HIGH PERFORMANCE

The direct current isolators of the 70 RT HP Series are available from 16A to 40A in a plastic box. They guarantee a high breaking capacity up to 1.000 VDC while maintaining the rated operational current. Compliant with EN 60947-3 and CEI EN 60947-3:2021 (Annex D) standards for photovoltaic applications.

TOTAL PROTECTION

The isolators for photovoltaic applications are equipped of a plastic box with an IP66/IP67/IP69 degrees of protection, which guarantees total protection against dust and liquids, even in the case of high pressure and high temperatures water jets.

EXAMPLE OF PV APPLICATION

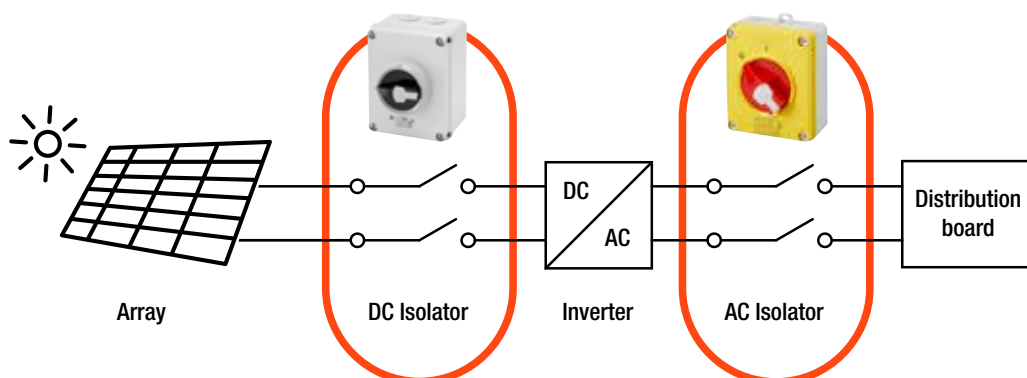



Versions for board

COMPLETE RANGE

The isolator switches for boards guarantee robustness and reliability in controlling and disconnecting circuits up to 800A. The offer is completed with the versions for DIN rail fixing from 16A to 63A.

HIGH PERFORMANCE

The versions from 200A to 800A offer a high disconnection capacity maintaining the rated current up to 500V. Thanks to the transparent window on each poles, it is clearly visible if the switch is open or closed, even from a distance.

ACCESSORIABILITY

The handles feature an integrated padlockable locking mechanism. The range is also equipped with auxiliary contacts suitable for every need. It is also possible to customize the adjustment range by cutting the supplied shaft.

70 RT HP

In	POLES	ROTARY ISOLATOR SWITCHES - 70 RT HP					
		VERSIONS IN PLASTIC BOX				VERSIONS IN METAL BOX	
		CONTROL  Dim: 125 x 150 x 75,5 mm	CONTROL  Dim: 153,6 x 200,6 x 117 mm	EMERGENCY  Dim: 125 x 150 x 75,5 mm	EMERGENCY  Dim: 153,6 x 200,6 x 117 mm	CONTROL  Dim: 140 x 165 x 64 mm	CONTROL  Dim: 200 x 230 x 110 mm
16A	2P	GW 70 401 P		GW 70 431 P		GW 70 401 M	
	3P	GW 70 402 P		GW 70 432 P		GW 70 402 M	
	3P+N	GW 70 402 NP		GW 70 432 NP		GW 70 402 NM	
	4P	GW 70 403 P		GW 70 433 P		GW 70 403 M	
	6P		GW 70 601 P		GW 70 641P		GW 70 701M
	8P		GW 70 621 P		GW 70 661P		GW 70 721M
25A	2P	GW 70 416 P		GW 70 486 P		GW 70 416 M	
	3P	GW 70 417 P		GW 70 487 P		GW 70 417 M	
	3P+N	GW 70 417 NP		GW 70 487 NP		GW 70 417 NM	
	4P	GW 70 418 P		GW 70 488 P		GW 70 418 M	
	6P		GW 70 602 P		GW 70 642 P		GW 70 702 M
	8P		GW 70 622 P		GW 70 662 P		GW 70 722 M
32A	2P	GW 70 404 P		GW 70 434 P		GW 70 404 M	
	3P	GW 70 405 P		GW 70 435 P		GW 70 405 M	
	3P+N	GW 70 405 NP		GW 70 435 NP		GW 70 405 NM	
	4P	GW 70 406 P		GW 70 436 P		GW 70 406 M	
	6P		GW 70 603 P		GW 70 643 P		GW 70 703 M
	8P		GW 70 623 P		GW 70 663 P		GW 70 723 M
40A	2P	GW 70 413 P		GW 70 441 P		GW 70 413 M	
	3P	GW 70 414 P		GW 70 442 P		GW 70 414 M	
	3P+N	GW 70 414 NP		GW 70 442 NP		GW 70 414 NM	
	4P	GW 70 415 P		GW 70 443 P		GW 70 415 M	
	6P		GW 70 604 P		GW 70 644 P		GW 70 704 M
	8P		GW 70 624 P		GW 70 664 P		GW 70 724 M
		 Dim: 156 x 200 x 95 mm	 236,5 x 315,5 x 178 mm	 Dim: 156 x 200 x 95 mm	 Dim: 236,5 x 315,5 x 178 mm	 Dim: 215 x 252 x 91 mm	 Dim: 257 x 307 x 121 mm
63A	3P	GW 70 407 P		GW 70 437 P		GW 70 407 M	
	3P+N	GW 70 407 NP		GW 70 437 NP		GW 70 407 NM	
	4P	GW 70 408 P		GW 70 438 P		GW 70 408 M	
	6P		GW 70 605 P		GW 70 645 P		GW 70 705 M
	8P		GW 70 625 P		GW 70 665 P		GW 70 725 M
80A	3P	GW 70 419 P		GW 70 489 P		GW 70 419 M	
	3P+N	GW 70 419 NP		GW 70 489 NP		GW 70 419 NM	
	4P	GW 70 420 P		GW 70 490 P		GW 70 420 M	
		 Dim: 236,5 x 316 x 178 mm	 Dim: 236,5 x 316 x 178 mm	 Dim: 236,5 x 316 x 178 mm	 Dim: 236,5 x 316 x 178 mm	 Dim: 307 x 257 x 121 mm	 Dim: 307 x 257 x 121 mm
100A	3P	GW 70 421 P		GW 70 491 P		GW 70 421 M	
	3P+N	GW 70 421 NP		GW 70 491 NP		GW 70 421 NM	
	4P	GW70422P		GW 70 492 P		GW 70 422 M	
	6P		GW 70 607 P		GW 70 647 P		GW 70 707 M
	8P		GW 70 627 P		GW 70 667 P		GW 70 727 M
125A	3P	GW 70 423 P		GW 70 493 P		GW 70 423 M	
	3P+N	GW 70 423 NP		GW 70 493 NP		GW 70 423 NM	
	4P	GW 70 424 P		GW 70 494 P		GW 70 424 M	
160A	3P	GW 70 425 P		GW 70 495 P		GW 70 425 M	
	3P+N	GW 70 425 NP		GW 70 495 NP		GW 70 425 NM	
	4P	GW 70 426 P		GW 70 496 P		GW 70 426 M	


NOTE: the dimensions shown above refer to the external dimensions of the boxes without considering the knob.

ROTARY ISOLATOR SWITCHES - 70 RT HP							
VERSIONS IN METAL BOX		AUXILIARY CONTACTS			DC VERSIONS FOR PHOTOVOLTAIC APPLICATIONS	ATEX VERSIONS IN METAL BOX	
EMERGENCY	EMERGENCY					CONTROL	EMERGENCY
							
Dim: 140 x 165 x 64 mm	Dim: 200 x 230 x 110 mm	1NO + 1NC	2NO	2NC	Dim: 153,6 x 200,6 x 117 mm	Dim: 140 x 165 x 63 mm	Dim: 140 x 165 x 63 mm
GW 70 431 M		GW 70 026	GW 70 027	GW 70 028	GW 70 231	GW 70 451	GW 70 471
GW 70 432 M						GW 70 452	GW 70 472
GW 70 432 NM							
GW 70 433 M						GW 70 453	GW 70 473
	GW 70 741M GW 70 761M	GW 70 029					
GW 70 486 M		GW 70 026	GW 70 027	GW 70 028	GW 70 235		
GW 70 487 M							
GW 70 487 NM							
GW 70 488 M							
	GW 70 742 M GW 70 762 M	GW 70 029					
GW 70 434 M		GW 70 026	GW 70 027	GW 70 028	GW 70 238	GW 70 454	GW 70 474
GW 70 435 M						GW 70 455	GW 70 475
GW 70 435 NM							
GW 70 436 M					GW 70 239	GW 70 456	GW 70 476
	GW 70 743 M GW 70 763 M	GW 70 029					
GW 70 441 M		GW 70 026	GW 70 027	GW 70 028	GW 70 241		
GW 70 442 M							
GW 70 442 NM							
GW 70 443 M					GW 70 242		
	GW 70 744 M GW 70 764 M	GW 70 029					
							
Dim: 215 x 252 x 91 mm	257 x 307 x 121 mm	1NO + 1NC	2NA	2NC		Dim: 215 x 252 x 91 mm	Dim: 215 x 252 x 91 mm
GW 70 437 M		GW 70 026	GW 70 027	GW 70 028		GW 70 457	GW 70 477
GW 70 437 NM							
GW 70 438 M						GW 70 458	GW 70 478
	GW 70 745 M GW 70 765 M						
GW 70 489 M		GW 70 026	GW 70 027	GW 70 028			
GW 70 489 NM							
GW 70 490 M							
							
Dim: 307 x 257 x 121 mm	Dim: 307 x 257 x 121 mm	1NO + 1NC	2NA	2NC		Dim: 307 x 257 x 120 mm	Dim: 307 x 257 x 120 mm
GW 70 491 M		GW 70 029				GW 70 459	GW 70 479
GW 70 491 NM							
GW 70 492 M						GW 70 460	GW 70 480
	GW 70 747 M GW 70 767 M						
GW 70 493 M							
GW 70 493 NM							
GW 70 494 M							
GW 70 495 M							
GW 70 495 NM							
GW 70 496 M							


70 RT HP

In	POLES	ROTARY ISOLATOR SWITCHES - 70 RT HP						
		VERSIONS FOR BOARD				AUXILIARY CONTACTS		
		PANEL/DOOR MOUNTING*	DIN RAIL MOUNTING					
								
						1NO + 1NC	2NO	2NC
16A	2P	GW 70 001	GW 70 201			GW 70 026	GW 70 027	GW 70 028
	3P	GW 70 002	GW 70 202					
	4P	GW 70 003	GW 70 203					
25A	3P	GW 70 052						
	4P	GW 70 053						
32A	2P	GW 70 004	GW 70 204					
	3P	GW 70 005	GW 70 205					
	4P	GW 70 006	GW 70 206					
40A	3P	GW 70 055						
	4P	GW 70 056						
63A	3P	GW 70 007	GW 70 207					
	4P	GW 70 008	GW 70 208					
80A	3P	GW 70 058						
	4P	GW 70 059						
100A	3P	GW 70 061						
	4P	GW 70 062						
125A	3P	GW 70 064						
	4P	GW 70 065						
160A	3P	GW 70 067						
	4P	GW 70 068						

(*) Versions for panel/door mounting can be accessorized with galvanized steel extending brackets GW 70 009.

		ROTARY ISOLATOR SWITCHES - 70 RT HP					
In	POLES	PANEL/DOOR MOUNTING	AUXILIARY CONTACTS		PHASE BARRIERS	TERMINAL COVERS	SHAFTS
							
			1NC	1EB			
200A	3P		GW70035	GW70036	GW70171	GW70181	GW70040
	4P				GW70172	GW70182	
250A	3P				GW70171	GW70181	
	4P				GW70172	GW70182	
315A	3P				GW70173	GW70183	
	4P				GW70174	GW70184	
400A	3P				GW70173	GW70183	
	4P				GW70174	GW70184	
630A	3P				GW70175	GW70185	GW70041
	4P				GW70176	GW70186	
800A	3P				GW70175	GW70185	
	4P				GW70176	GW70186	

TECHNICAL PAGES

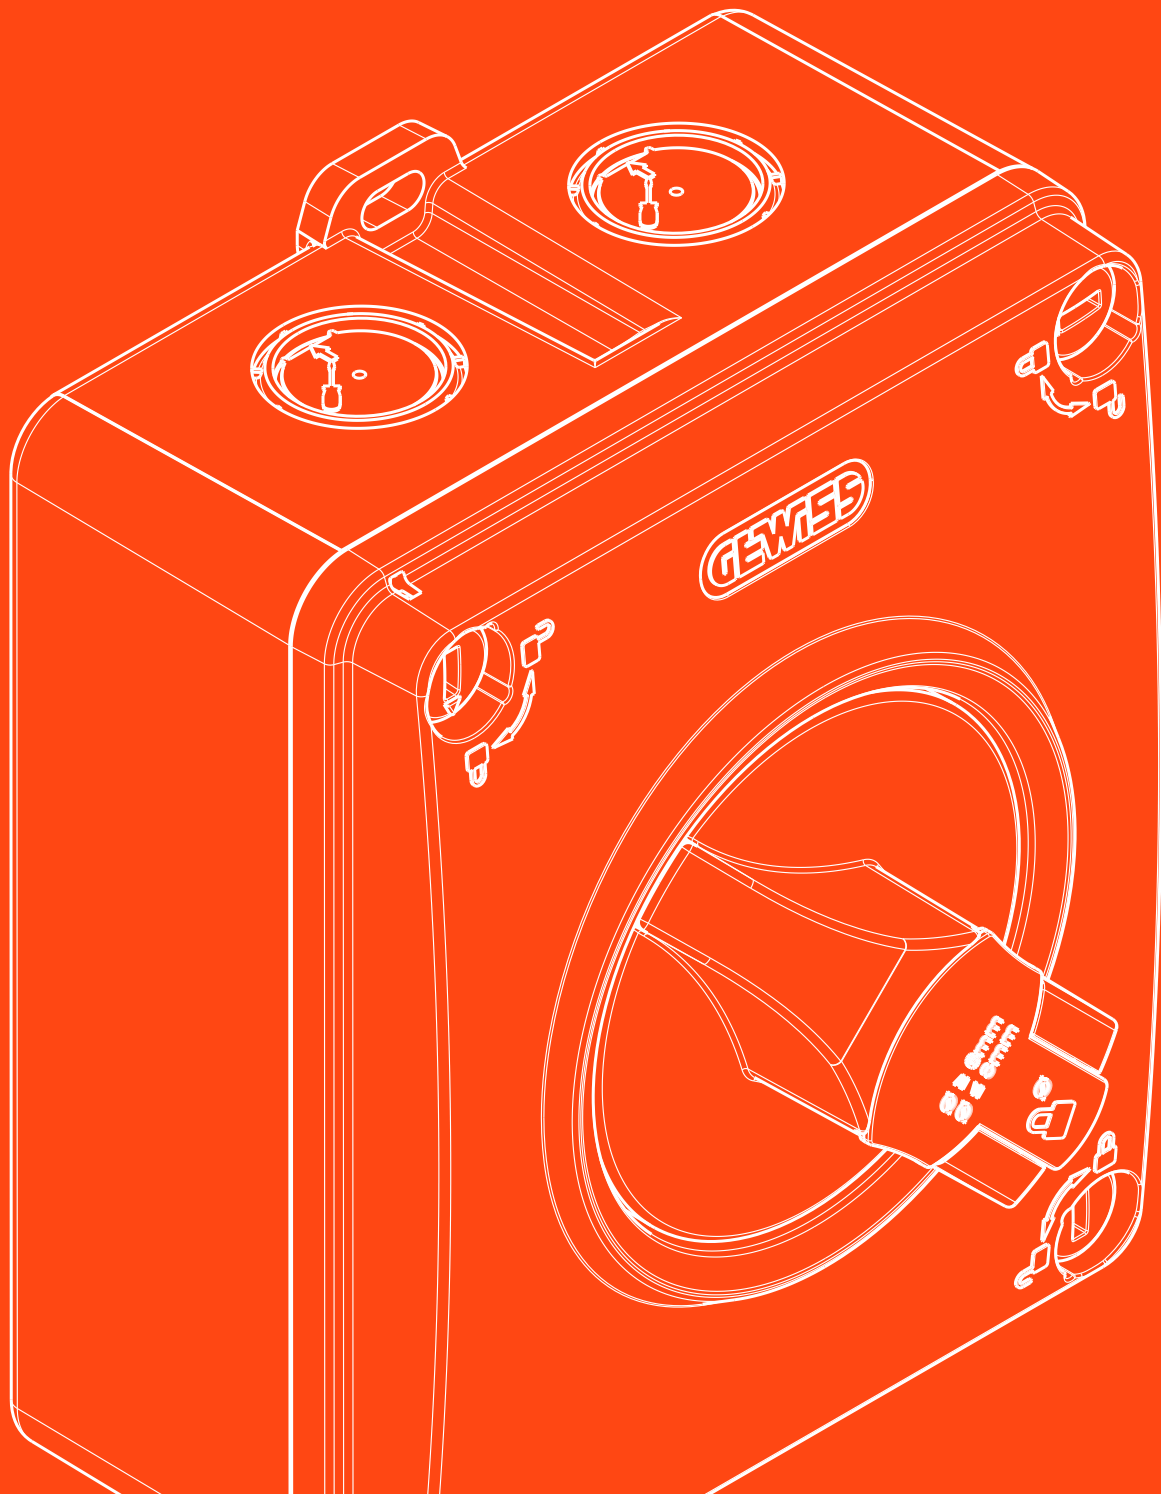

70 RT HP

70 RT HP - SURFACE MOUNTING ROTARY ISOLATOR IN ISOLATING BOX - IP66/IP67/69

CONTROL VERSIONS



GW 70 406 P

SURFACE-MOUNTING ISOLATOR - CONTROL VERSION WITH LOCKABLE BLACK KNOB - IP66/IP67/IP69

Code	No. of poles	Outer dim. LxHxD (mm)	Holes entry	Lid screws (no. and type)	Pack Carton
Rated current (A): 16					
GW 70 401 P	2P	125x150x75,5	2 x M20/25 + 2 x M20/25	4 insul. a 1/4 turn	1/16
GW 70 402 P	3P	125x150x75,5	2 x M20/25 + 2 x M20/25	4 insul. a 1/4 turn	1/16
GW 70 402 NP	3P+N	125x150x75,5	2 x M20/25 + 2 x M20/25	4 insul. a 1/4 turn	1/16
GW 70 403 P	4P	125x150x75,5	2 x M20/25 + 2 x M20/25	4 insul. a 1/4 turn	1/16
GW 70 601 P	6P	153,6x200,6x117	4xM20	4 insulation	1/4
GW 70 621 P	8P	153,6x200,6x117	4xM20	4 insulation	1/4
Rated current (A): 25					
GW 70 416 P	2P	125x150x75,5	2 x M20/25 + 2 x M20/25	4 insul. a 1/4 turn	1/16
GW 70 417 P	3P	125x150x75,5	2 x M20/25 + 2 x M20/25	4 insul. a 1/4 turn	1/16
GW 70 417 NP	3P+N	125x150x75,5	2 x M20/25 + 2 x M20/25	4 insul. a 1/4 turn	1/16
GW 70 418 P	4P	125x150x75,5	2 x M20/25 + 2 x M20/25	4 insul. a 1/4 turn	1/16
GW 70 602 P	6P	153,6x200,6x117	4xM25	4 insulation	1/4
GW 70 622 P	8P	153,6x200,6x117	4xM25	4 insulation	1/4
Rated current (A): 32					
GW 70 404 P	2P	125x150x75,5	2 x M20/25 + 2 x M20/25	4 insul. a 1/4 turn	1/16
GW 70 405 P	3P	125x150x75,5	2 x M20/25 + 2 x M20/25	4 insul. a 1/4 turn	1/16
GW 70 405 NP	3P+N	125x150x75,5	2 x M20/25 + 2 x M20/25	4 insul. a 1/4 turn	1/16
GW 70 406 P	4P	125x150x75,5	2 x M20/25 + 2 x M20/25	4 insul. a 1/4 turn	1/16
GW 70 603 P	6P	153,6x200,6x117	4xM25	4 insulation	1/4
GW 70 623 P	8P	153,6x200,6x117	4xM25	4 insulation	1/4
Rated current (A): 40					
GW 70 413 P	2P	125x150x75,5	2 x M20/25 + 2 x M20/25	4 insul. a 1/4 turn	1/16
GW 70 414 P	3P	125x150x75,5	2 x M20/25 + 2 x M20/25	4 insul. a 1/4 turn	1/16
GW 70 414 NP	3P+N	125x150x75,5	2 x M20/25 + 2 x M20/25	4 insul. a 1/4 turn	1/16
GW 70 415 P	4P	125x150x75,5	2 x M20/25 + 2 x M20/25	4 insul. a 1/4 turn	1/16
GW 70 604 P	6P	153,6x200,6x117	4xM32	4 insulation	1/4
GW 70 624 P	8P	153,6x200,6x117	4xM32	4 insulation	1/4
Rated current (A): 63					
GW 70 407 P	3P	156x200x95	2 x M25/32 + 2 x M25/32	4 insul. a 1/4 turn	1/6
GW 70 407 NP	3P+N	156x200x95	2 x M25/32 + 2 x M25/32	4 insul. a 1/4 turn	1/6
GW 70 408 P	4P	156x200x95	2 x M25/32 + 2 x M25/32	4 insul. a 1/4 turn	1/6
GW 70 605 P	6P	236,5x315,5x178	-	4 insulation	1
GW 70 625 P	8P	236,5x315,5x178	-	4 insulation	1
Rated current (A): 80					
GW 70 419 P	3P	156x200x95	2 x M25/32 + 2 x M25/32	4 insul. a 1/4 turn	1/6
GW 70 419 NP	3P+N	156x200x95	2 x M25/32 + 2 x M25/32	4 insul. a 1/4 turn	1/6
GW 70 420 P	4P	156x200x95	2 x M25/32 + 2 x M25/32	4 insul. a 1/4 turn	1/6
Rated current (A): 100					
GW 70 421 P	3P	236,5x316x178	-	4 insulation	1
GW 70 421 NP	3P+N	236,5x316x178	-	4 insulation	1
GW 70 422 P	4P	236,5x316x178	-	4 insulation	1
GW 70 607 P	6P	236,5x315,5x178	-	4 insulation	1
GW 70 627 P	8P	236,5x315,5x178	-	4 insulation	1
Rated current (A): 125					
GW 70 423 P	3P	236,5x316x178	-	4 insulation	1
GW 70 423 NP	3P+N	236,5x316x178	-	4 insulation	1
GW 70 424 P	4P	236,5x316x178	-	4 insulation	1
Rated current (A): 160					
GW 70 425 P	3P	236,5x316x178	-	4 insulation	1
GW 70 425 NP	3P+N	236,5x316x178	-	4 insulation	1
GW 70 426 P	4P	236,5x316x178	-	4 insulation	1

NOTE: can be padlocked in ON and OFF position with max. 3 locks with diameter max. 8 mm.
The 63-100A 6P-8P versions can be padlocked only in the OFF position with IP66/IP69 protection degree.
Versions 100-160A up to 4P and 63-100A 6P and 8P allow to install max. 2 x M63 cable glands.
All Lid screws are sealable.

EMERGENCY VERSIONS



GW 70 436 P

SURFACE-MOUNTING ISOLATOR - EMERGENCY VERSION WITH LOCKABLE RED KNOB - IP66/IP67/IP69

Code	No. of poles	Outer dim. LxHxD (mm)	Holes entry	Lid screws (no. and type)	Pack Carton
Rated current (A): 16					
GW 70 431 P	2P	125x150x75,5	2 x M20/25 + 2 x M20/25	4 insul. a 1/4 turn	1/16
GW 70 432 P	3P	125x150x75,5	2 x M20/25 + 2 x M20/25	4 insul. a 1/4 turn	1/16
GW 70 432 NP	3P+N	125x150x75,5	2 x M20/25 + 2 x M20/25	4 insul. a 1/4 turn	1/16
GW 70 433 P	4P	125x150x75,5	2 x M20/25 + 2 x M20/25	4 insul. a 1/4 turn	1/16
GW 70 641 P	6P	153,6x200,6x117	4xM20	4 insulation	1/4
GW 70 661 P	8P	153,6x200,6x117	4xM20	4 insulation	1/4
Rated current (A): 25					
GW 70 486 P	2P	125x150x75,5	2 x M20/25 + 2 x M20/25	4 insul. a 1/4 turn	1/16
GW 70 487 P	3P	125x150x75,5	2 x M20/25 + 2 x M20/25	4 insul. a 1/4 turn	1/16
GW 70 487 NP	3P+N	125x150x75,5	2 x M20/25 + 2 x M20/25	4 insul. a 1/4 turn	1/16
GW 70 488 P	4P	125x150x75,5	2 x M20/25 + 2 x M20/25	4 insul. a 1/4 turn	1/16
GW 70 642 P	6P	153,6x200,6x117	4xM25	4 insulation	1/4
GW 70 662 P	8P	153,6x200,6x117	4xM25	4 insulation	1/4
Rated current (A): 32					
GW 70 434 P	2P	125x150x75,5	2 x M20/25 + 2 x M20/25	4 insul. a 1/4 turn	1/16
GW 70 435 P	3P	125x150x75,5	2 x M20/25 + 2 x M20/25	4 insul. a 1/4 turn	1/16
GW 70 435 NP	3P+N	125x150x75,5	2 x M20/25 + 2 x M20/25	4 insul. a 1/4 turn	1/16
GW 70 436 P	4P	125x150x75,5	2 x M20/25 + 2 x M20/25	4 insul. a 1/4 turn	1/16
GW 70 643 P	6P	153,6x200,6x117	4xM25	4 insulation	1/4
GW 70 663 P	8P	153,6x200,6x117	4xM25	4 insulation	1/4
Rated current (A): 40					
GW 70 441 P	2P	125x150x75,5	2 x M20/25 + 2 x M20/25	4 insul. a 1/4 turn	1/16
GW 70 442 P	3P	125x150x75,5	2 x M20/25 + 2 x M20/25	4 insul. a 1/4 turn	1/16
GW 70 442 NP	3P+N	125x150x75,5	2 x M20/25 + 2 x M20/25	4 insul. a 1/4 turn	1/16
GW 70 443 P	4P	125x150x75,5	2 x M20/25 + 2 x M20/25	4 insul. a 1/4 turn	1/16
GW 70 644 P	6P	153,6x200,6x117	4xM32	4 insulation	1/4
GW 70 664 P	8P	153,6x200,6x117	4xM32	4 insulation	1/4
Rated current (A): 63					
GW 70 437 P	3P	156x200x95	2 x M25/32 + 2 x M25/32	4 insul. a 1/4 turn	1/6
GW 70 437 NP	3P+N	156x200x95	2 x M25/32 + 2 x M25/32	4 insul. a 1/4 turn	1/6
GW 70 438 P	4P	156x200x95	2 x M25/32 + 2 x M25/32	4 insul. a 1/4 turn	1/6
GW 70 645 P	6P	236,5x315,5x178	-	4 insulation	1
GW 70 665 P	8P	236,5x315,5x178	-	4 insulation	1
Rated current (A): 80					
GW 70 489 P	3P	156x200x95	2 x M25/32 + 2 x M25/32	4 insul. a 1/4 turn	1/6
GW 70 489 NP	3P+N	156x200x95	2 x M25/32 + 2 x M25/32	4 insul. a 1/4 turn	1/6
GW 70 490 P	4P	156x200x95	2 x M25/32 + 2 x M25/32	4 insulation	1/6
Rated current (A): 100					
GW 70 491 P	3P	236,5x316x178	-	4 insulation	1
GW 70 491 NP	3P+N	236,5x316x178	-	4 insulation	1
GW 70 492 P	4P	236,5x316x178	-	4 insulation	1
GW 70 647 P	6P	236,5x315,5x178	-	4 insulation	1
GW 70 667 P	8P	236,5x315,5x178	-	4 insulation	1
Rated current (A): 125					
GW 70 493 P	3P	236,5x316x178	-	4 insulation	1
GW 70 493 NP	3P+N	236,5x316x178	-	4 insulation	1
GW 70 494 P	4P	236,5x316x178	-	4 insulation	1
Rated current (A): 160					
GW 70 495 P	3P	236,5x316x178	-	4 insulation	1
GW 70 495 NP	3P+N	236,5x316x178	-	4 insulation	1
GW 70 496 P	4P	236,5x316x178	-	4 insulation	1

NOTE: can be padlocked in OFF position with max. 3 locks with diameter max. 8 mm.

Versions 100-160A allow to install max. 2 x M63 cable glands.

All Lid screws are sealable.

70 RT HP

70 RT HP - SURFACE-MOUNTING ROTARY ISOLATOR IN METAL BOX - IP66

CONTROL VERSIONS



GW 70 406 M

SURFACE-MOUNTING ISOLATOR - CONTROL VERSION WITH LOCKABLE BLACK/GREY KNOB - IP66

Code	No. of poles	Outer dim. LxHxD (mm)	Holes entry	Pack Carton
Rated current (A): 16				
GW 70 401 M	2P	140x165x64	4xM20	1
GW 70 402 M	3P	140x165x64	4xM20	1
GW 70 402 NM	3P+N	140x165x64	4xM20	1
GW 70 403 M	4P	140x165x64	4xM20	1
GW 70 701 M	6P	200x230x110	4xM20	1
GW 70 721 M	8P	200x230x110	4xM20	1
Rated current (A): 25				
GW 70 416 M	2P	140x165x64	2 x M20 + 2 x M25	1
GW 70 417 M	3P	140x165x64	2 x M20 + 2 x M25	1
GW 70 417 NM	3P+N	140x165x64	2 x M20 + 2 x M25	1
GW 70 418 M	4P	140x165x64	2 x M20 + 2 x M25	1
GW 70 702 M	6P	200x230x110	4xM20	1
GW 70 722 M	8P	200x230x110	4xM20	1
Rated current (A): 32				
GW 70 404 M	2P	140x165x64	2 x M20 + 2 x M25	1
GW 70 405 M	3P	140x165x64	2 x M20 + 2 x M25	1
GW 70 405 NM	3P+N	140x165x64	2 x M20 + 2 x M25	1
GW 70 406 M	4P	140x165x64	2 x M20 + 2 x M25	1
GW 70 703 M	6P	200x230x110	4xM20	1
GW 70 723 M	8P	200x230x110	4xM20	1
Rated current (A): 40				
GW 70 413 M	2P	140x165x64	2 x M20 + 2 x M25	1
GW 70 414 M	3P	140x165x64	2 x M20 + 2 x M25	1
GW 70 414 NM	3P+N	140x165x64	2 x M20 + 2 x M25	1
GW 70 415 M	4P	140x165x64	2 x M20 + 2 x M25	1
GW 70 704 M	6P	200x230x110	4xM25	1
GW 70 724 M	8P	200x230x110	4xM25	1
Rated current (A): 63				
GW 70 407 M	3P	215x252x91	4xM32	1
GW 70 407 NM	3P+N	215x252x91	4xM32	1
GW 70 408 M	4P	215x252x91	4xM32	1
GW 70 705 M	6P	257x307x121	-	1
GW 70 725 M	8P	257x307x121	-	1
Rated current (A): 80				
GW 70 419 M	3P	215x252x91	4xM32	1
GW 70 419 NM	3P+N	215x252x91	4xM32	1
GW 70 420 M	4P	215x252x91	4xM32	1
Rated current (A): 100				
GW 70 421 M	3P	257x307x121	-	1
GW 70 421 NM	3P+N	257x307x121	-	1
GW 70 422 M	4P	257x307x121	-	1
GW 70 707 M	6P	257x307x121	-	1
GW 70 727 M	8P	257x307x121	-	1
Rated current (A): 125				
GW 70 423 M	3P	257x307x121	-	1
GW 70 423 NM	3P+N	257x307x121	-	1
GW 70 424 M	4P	257x307x121	-	1
Rated current (A): 160				
GW 70 425 M	3P	257x307x121	-	1
GW 70 425 NM	3P+N	257x307x121	-	1
GW 70 426 M	4P	257x307x121	-	1

NOTE: can be padlocked in ON and OFF position with max. 3 locks with diameter max. 8 mm.

Versions 100-160A up to 4P and 63-100A 6P and 8P allow to install max. 2 x M63 cable glands.

EMERGENCY VERSIONS



GW 70 436 M

SURFACE-MOUNTING ISOLATOR - EMERGENCY VERSION WITH LOCKABLE RED/YELLOW - IP66

Code	No. of poles	Outer dim. LxHxD (mm)	Holes entry	Pack Carton
Rated current (A): 16				
GW 70 431 M	2P	140x165x64	4xM20	1
GW 70 432 M	3P	140x165x64	4xM20	1
GW 70 432 NM	3P+N	140x165x64	4xM20	1
GW 70 433 M	4P	140x165x64	4xM20	1
GW 70 741 M	6P	200x230x110	4xM20	1
GW 70 761 M	8P	200x230x110	4xM20	1
Rated current (A): 25				
GW 70 486 M	2P	140x165x64	2 x M20 + 2 x M25	1
GW 70 487 M	3P	140x165x64	2 x M20 + 2 x M25	1
GW 70 487 NM	3P+N	140x165x64	2 x M20 + 2 x M25	1
GW 70 488 M	4P	140x165x64	2 x M20 + 2 x M25	1
GW 70 742 M	6P	200x230x110	4xM20	1
GW 70 762 M	8P	200x230x110	4xM20	1
Rated current (A): 32				
GW 70 434 M	2P	140x165x64	2 x M20 + 2 x M25	1
GW 70 435 M	3P	140x165x64	2 x M20 + 2 x M25	1
GW 70 435 NM	3P+N	140x165x64	2 x M20 + 2 x M25	1
GW 70 436 M	4P	140x165x64	2 x M20 + 2 x M25	1
GW 70 743 M	6P	200x230x110	4xM20	1
GW 70 763 M	8P	200x230x110	4xM20	1
Rated current (A): 40				
GW 70 441 M	2P	140x165x64	2 x M20 + 2 x M25	1
GW 70 442 M	3P	140x165x64	2 x M20 + 2 x M25	1
GW 70 442 NM	3P+N	140x165x64	2 x M20 + 2 x M25	1
GW 70 443 M	4P	140x165x64	2 x M20 + 2 x M25	1
GW 70 744 M	6P	200x230x110	4xM25	1
GW 70 764 M	8P	200x230x110	4xM25	1
Rated current (A): 63				
GW 70 437 M	3P	215x252x91	4xM32	1
GW 70 437 NM	3P+N	215x252x91	4xM32	1
GW 70 438 M	4P	215x252x91	4xM32	1
GW 70 745 M	6P	257x307x121	-	1
GW 70 765 M	8P	257x307x121	-	1
Rated current (A): 80				
GW 70 489 M	3P	215x252x91	4xM32	1
GW 70 489 NM	3P+N	215x252x91	4xM32	1
GW 70 490 M	4P	215x252x91	4xM32	1
Rated current (A): 100				
GW 70 491 M	3P	257x307x121	-	1
GW 70 491 NM	3P+N	257x307x121	-	1
GW 70 492 M	4P	257x307x121	-	1
GW 70 747 M	6P	257x307x121	-	1
GW 70 767 M	8P	257x307x121	-	1
Rated current (A): 125				
GW 70 493 M	3P	257x307x121	-	1
GW 70 493 NM	3P+N	257x307x121	-	1
GW 70 494 M	4P	257x307x121	-	1
Rated current (A): 160				
GW 70 495 M	3P	257x307x121	-	1
GW 70 495 NM	3P+N	257x307x121	-	1
GW 70 496 M	4P	257x307x121	-	1

NOTE: can be padlocked in ON and OFF position with max. 3 locks with diameter max. 8 mm.

Versions 100-160A up to 4P and 63-100A 6P and 8P allow to install max. 2 x M63 cable glands.

70 RT HP

70 RT HP - SURFACE MOUNTING ROTARY ISOLATOR IN ISOLATING BOX IN DIRECT CURRENT - IP66/IP67/IP69

VERSIONS FOR PHOTOVOLTAIC APPLICATION



GW 70 231

SURFACE-MOUNTING ISOLATOR - CONTROL VERSION WITH LOCKABLE BLACK KNOB - IP66/IP67/IP69

Code	No. of poles	Outer dim. LxHxD (mm)	Holes entry	Lid screws (no. and type)	Pack Carton
Rated current (A): 16					
GW 70 231	2P	153,6x200,6x117	4xM20	4 insulation	1/4
Rated current (A): 25					
GW 70 235	3P	153,6x200,6x117	4xM20	4 insulation	1/4
Rated current (A): 32					
GW 70 238	3P	153,6x200,6x117	4xM20	4 insulation	1/4
GW 70 239	4P	153,6x200,6x117	4xM25	4 insulation	1/4
Rated current (A): 40					
GW 70 241	3P	153,6x200,6x117	4xM20	4 insulation	1/4
GW 70 242	4P	153,6x200,6x117	4xM25	4 insulation	1/4

70 RT HP - ISOLATORS FOR AUTOMATION AND DISTRIBUTION BOARD

VERSIONS FOR BOARD 16 ÷ 160 A



GW 70 001

ISOLATOR SWITCHES FOR DISTRIBUTION BOARD WITH PADLOCKABLE RED/YELLOW KNOB AND CONTROL TRANSMISSION SHAFT

Code	No. of poles	No. of modules EN 50022	Regulation field	Pack Carton
Rated current (A): 16				
GW 70 001	2P	4	87 - 145 mm	1/10
GW 70 002	3P	4	87 - 145 mm	1/10
GW 70 003	4P	4	87 - 145 mm	1/10
Rated current (A): 25				
GW 70 052	3P	4	87 - 145 mm	1/10
GW 70 053	4P	4	87 - 145 mm	1/10
Rated current (A): 32				
GW 70 004	2P	4	87 - 145 mm	1/10
GW 70 005	3P	4	87 - 145 mm	1/10
GW 70 006	4P	4	87 - 145 mm	1/10
Rated current (A): 40				
GW 70 055	3P	4	87 - 145 mm	1/10
GW 70 056	4P	4	87 - 145 mm	1/10
Rated current (A): 63				
GW 70 007	3P	5	114 - 177 mm	1/5
GW 70 008	4P	5	114 - 177 mm	1/5
Rated current (A): 80				
GW 70 058	3P	5	114 - 177 mm	1/5
GW 70 059	4P	5	114 - 177 mm	1/5
Rated current (A): 100				
GW 70 061	3P	4	194 max	1/6
GW 70 062	4P	6	194 max	1/6
Rated current (A): 125				
GW 70 064	3P	4	194 max	1/6
GW 70 065	4P	6	194 max	1/6
Rated current (A): 160				
GW 70 067	3P	4	194 max	1/6
GW 70 068	4P	6	194 max	1/6

CHARACTERISTICS: the regulation field can be obtained by cutting the shaft supplied. Versions for panel/door mounting 16A ÷ 80A can be accessorized with galvanized steel extending brackets GW 70 009.



GW 70 009

GALVANIZED STEEL EXTENDING BRACKETS FOR REAR FIXING

Code	For isolator	Regulation field	Pack Carton
Rated current (A): 16			
GW 70 009	16 A - 25 A - 32 A - 40 A - 63 A - 80 A	117-305mm (16-40A) - 144-337mm (63-80A)	1/10

CHARACTERISTICS: the regulation field can be obtained by cutting both the shaft supplied and the extension brackets at the references shown.

ACCESSORIES SUPPLIED: self-tapping screw kit.

VERSIONS FOR BOARD 200 ÷ 800 A


GW 70 070

ISOLATOR SWITCHES FOR DISTRIBUTION BOARD WITH PADLOCKABLE BLACK KNOB AND CONTROL TRANSMISSION SHAFT

Code	No. of poles	No. of modules EN 50022	Regulation field	Pack Carton
Rated current (A): 200				
GW 70 070	3P	10	124 - 144 mm	1
GW 70 071	4P	12	124 - 144 mm	1
Rated current (A): 250				
GW 70 073	3P	10	124 - 144 mm	1
GW 70 074	4P	12	124 - 144 mm	1
Rated current (A): 315				
GW 70 076	3P	12	157 - 277 mm	1
GW 70 077	4P	15	157 - 277 mm	1
Rated current (A): 400				
GW 70 079	3P	12	157 - 277 mm	1
GW 70 080	4P	15	157 - 277 mm	1
Rated current (A): 630				
GW 70 085	3P	16	-	1
GW 70 086	4P	20	-	1
Rated current (A): 800				
GW 70 088	3P	16	-	1
GW 70 089	4P	20	-	1

VERSIONS FOR FIXING ON DIN RAIL


GW 70 203

ISOLATOR SWITCHES FOR DIN RAIL WITH BLACK KNOB

Code	No. of poles	No. of modules EN 50022	Pack Carton
Rated current (A): 16			
GW 70 201	2P	4	1/24
GW 70 202	3P	4	1/24
GW 70 203	4P	4	1/24
Rated current (A): 32			
GW 70 204	2P	4	1/24
GW 70 205	3P	4	1/24
GW 70 206	4P	4	1/24
Rated current (A): 63			
GW 70 207	3P	5	1/12
GW 70 208	4P	5	1/12

COMPLEMENTARY ITEMS



GW 70 026

AUXILIARY CONTACTS

Code	Type of contact	For isolator	Pack Carton
GW 70 026	1 NO + 1 NC	16 A - 25 A - 32 A - 40 A - 63 A - 80 A	1/12
GW 70 027	2 NO	16 A - 25 A - 32 A - 40 A - 63 A - 80 A	1/12
GW 70 028	2 NC	16 A - 25 A - 32 A - 40 A - 63 A - 80 A	1/12
GW 70 029	1 NO + 1 NC	100 A - 125 A - 160 A	1/12
GW 70 035	1NC	200 ÷ 800 A	1/12
GW 70 036	1EB	200 ÷ 800 A	1/12

NOTE: it's possible to install:

- max. 2 (1 x side) aux contacts GW70026/GW70027/GW70028 on isolator up to 80A;

- max. 4 (2 x side) aux contacts GW70029 on isolator 100-125-160A (max 1. contatto ausiliario installabile su sezionatori 160A 4P);



GW 70 040

SHAFTS FOR BOARD VERSIONS

Code	Length	For isolator	Pack Carton
GW 70 040	300 mm	200 ÷ 400 A	1
GW 70 041	300 mm	630 A - 800 A	1



GW 70 171

PHASE BARRIERS

Code	Kit	For isolator	Pack Carton
GW 70 171	6 pieces	200 A - 250 A 3P	1
GW 70 172	8 pieces	200 A - 250 A 4P	1
GW 70 173	6 pieces	315 A - 400 A 3P	1
GW 70 174	8 pieces	315 A - 400 A 4P	1
GW 70 175	6 pieces	630 A - 800 A 3P	1
GW 70 176	8 pieces	630 A - 800 A 4P	1



GW 70 181

TERMINAL COVERS

Code	Kit	For isolator	Pack Carton
GW 70 181	3 pieces	200 A - 250 A 3P	1
GW 70 182	4 pieces	200 A - 250 A 4P	1
GW 70 183	3 pieces	315 A - 400 A 3P	1
GW 70 184	4 pieces	315 A - 400 A 4P	1
GW 70 185	3 pieces	630 A - 800 A 3P	1
GW 70 186	4 pieces	630 A - 800 A 4P	1

70 ATEX - DISCONNECTING SWITCHES IN PAINTED ALUMINIUM BOX - ZONE 22 (D)

CONTROL VERSIONS IN ALUMINIUM ALLOY BOX



GW 70 451

ATEX ROTARY WALL-MOUNTING SWITCHES FOR CONTROL, WITH BLACK KNOB - IP65

Code	No. of poles	Power AC3 400V (kW)	Outer dim. LxHxD (mm)	Pack Carton
Rated current (A): 16				
GW 70 451	2P	6 (230V)	140x165x135	1
GW 70 452	3P	10	140x165x135	1
GW 70 453	4P	10	140x165x135	1
Rated current (A): 32				
GW 70 454	2P	9 (230V)	140x165x135	1
GW 70 455	3P	15	140x165x135	1
GW 70 456	4P	15	140x165x135	1
Rated current (A): 63				
GW 70 457	3P	18.5	140x165x135	1
GW 70 458	4P	18.5	140x165x135	1
Rated current (A): 100				
GW 70 459	3P	30	215x252x94	1
GW 70 460	4P	30	215x252x94	1

ACCESSORIES SUPPLIED: cable gland M25 for 16A versions, M32 for 32-63A versions, and M40 for 100A.

CHARACTERISTICS: box in aluminium alloy painted in Grey RAL 7037.

ATEX Classification: Equipment-group II Category 3D.

Dust protection mode: tc.

Room temperature: -20°C ≤ Ta ≤ +40 °C.

NOTES: Can be padlocked with 3 locks in the OFF position and one in the ON position.

EMERGENCY VERSIONS IN ALUMINIUM ALLOY BOX



GW 70 471

ATEX ROTARY WALL-MOUNTING SWITCHES FOR EMERGENCY, WITH RED KNOB - IP65

Code	No. of poles	Power AC3 400V (kW)	Outer dim. LxHxD (mm)	Pack Carton
Rated current (A): 16				
GW 70 471	2P	6 (230V)	140x165x135	1
GW 70 472	3P	10	140x165x135	1
GW 70 473	4P	10	140x165x135	1
Rated current (A): 32				
GW 70 474	2P	9 (230V)	140x165x135	1
GW 70 475	3P	15	140x165x135	1
GW 70 476	4P	15	140x165x135	1
Rated current (A): 63				
GW 70 477	3P	18.5	140x165x135	1
GW 70 478	4P	18.5	140x165x135	1
Rated current (A): 100				
GW 70 479	3P	30	215x252x94	1
GW 70 480	4P	30	215x252x94	1

ACCESSORIES SUPPLIED: cable gland M25 for 16A versions, M32 for 32-63A versions, and M40 for 100A.

CHARACTERISTICS: box in aluminium alloy painted in Grey RAL 7037.

ATEX Classification: Equipment-group II Category 3D.

Dust protection mode: tc.

Room temperature: -20°C ≤ Ta ≤ +40 °C.

NOTES: Can be padlocked with 3 locks in the OFF position.

70 RT HP

ROTARY ISOLATOR SWITCHES IN ISOLATING BOX

Rotary isolator switches in control (with black knob) or emergency version (with red knob). Complying with EN 60947-3 standard.

Electrical data 16 A ÷ 160 A 2P, 3P, 3P+N, 4P

Rated current IEC				16A	25A	32A	40A	63A	80A	100A	125A	160A
Rated insulation voltage Ui			VAC	690	690	690	690	690	690	1000	1000	1000
Rated impulse withstand voltage Uimp			kV	4	4	4	4	4	4	8	8	8
Thermal current Ith/Ithe			A	16	25	32	40	63	80	100	125	160
Rated operational current IEC	AC21A Resistive loads, including moderate overloads	415V	A	16	25	32	40	63	80	100	125	160
	AC22A Mixed resistive and inductive loads, including moderate overloads	415V	A	16	25	32	40	63	80	100	125	125
	AC23A Switching of motor loads or other highly inductive loads (3 phases/3 poles)	415V	A	16	25	32	40	63	80	100	125	125
	Rated short time withstand current Icw (1s)		A	160	250	320	400	630	800	2500	2500	2500
Conditional short circuit current (Icc)		415V 500V	kA	10 6	10 6	10 6	10 6	6 6	6 6	10 6	10 6	10 6
Associated fuse for conditional short circuit current - Type gG			A	16	25	32	40	63	80	100	125	160
WIRING *												
Tightening torque			Nm	1				3		6		
Max. flexible wire			mm ²	1 ÷ 10				2,5 ÷ 25		4 ÷ 70		
Max. rigid wire			mm ²	1 ÷ 10				2,5 ÷ 25		4 ÷ 70		


* The surface of the wiring terminals is knurled to improve the grip of the stripped cable inserted into the terminal and to facilitate wiring operations.

Electrical data 16 A ÷ 100 A 6P, 8P

Rated current IEC				16A	25A	32A	40A	63A	100A
Rated insulation voltage Ui			VAC	1000	1000	1000	1000	1000	1000
Rated impulse withstand voltage Uimp			kV	8	8	8	8	8	8
Thermal current Ith/Ithe			A	16	25	32	40	63	100
Rated operational current IEC	AC21A Resistive loads, including moderate overloads	415V	A	16	25	32	40	63	100
	AC22A Mixed resistive and inductive loads, including moderate overloads	415V	A	16	25	32	40	63	100
	AC23A Switching of motor loads or other highly inductive loads (3 phases/3 poles)	415V	A	16	25	32	40	63	100
	Conditional short circuit current (Icc)	415V	kA	10	10	10	10	10	10
Associated fuse for conditional short circuit current - Type gG			A	40	40	40	40	100	100
WIRING *									
Tightening torque			Nm	2				6	
Max. flexible wire			mm ²	0,75 ÷ 16				4 ÷ 70	
Max. rigid wire			mm ²	0,75 ÷ 16				4 ÷ 70	



* The surface of the wiring terminals is knurled to improve the grip of the stripped cable inserted into the terminal and to facilitate wiring operations.

Wiring diagram

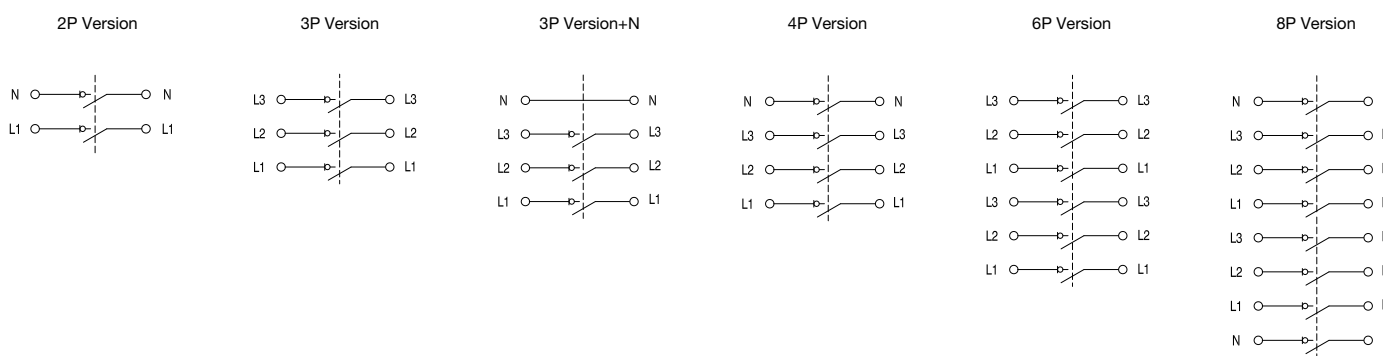



BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS										
Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Limited resistance	Resistant	Not resistant	Limited resistance	Limited resistance	Not resistant	Not resistant	Limited resistance	Resistant	Resistant

Mechanical data 16 A ÷ 160 A 2P, 3P, 3P+N, 4P

In (A)		16	25	32	40	63	80	100	125	160
Poles	2P	x	x	x	x					
	3P	x	x	x	x	x	x	x	x	x
	3P+N	x	x	x	x	x	x	x	x	x
	4P	x	x	x	x	x	x	x	x	x
Degree of protection		IP66/IP67/IP69								
Impact resistance		IK08								
Protection against indirect contact		□								
Thermo-pressure with ball (°C)		125 (device); 80 (box)								
Glow Wire Test (°C)		960 (device); 650 (box)								
Range of temperature (°C)		-25; +60								
Housable auxiliary contacts		Max. 2 (1 per side)						Max. 4* (2 per side)		
Holes entry	Upper sides	2 x M20/M25				2 x M25/M32		-		
	Lower sides	2 x M20/M25				2 x M25/M32		-		
Knob position		Open - OFF position		Close - ON position		Open - OFF position		Close - ON position		
										

(*) In 4P versions the max number of auxiliary contacts that can be installed is 3 (2+1). In the 160A 4P version the maximum number of auxiliary contacts that can be installed is 1.

Mechanical data 16 A ÷ 100 A 6P, 8P

In (A)		16	25	32	40	63	100
Poles	6P	x	x	x	x	x	x
	8P	x	x	x	x	x	x
Degree of protection		IP66/67/69				IP66/69	
Impact resistance		IK08					
Protection against indirect contact							
Thermo-pressure with ball (°C)		125 (device); 80 (box)					
Glow Wire Test (°C)		960 (device); 650 (box)					
Range of temperature (°C)		-25; +60					
Housable auxiliary contacts	6P	Max. 4 (2 per side)				Max. 1	
	8P	Max. 1				Max. 2 (1 per side)	
Holes entry	Upper sides	2 x M20	2 x M25		2 x M32	-	
	Lower sides	2 x M20	2 x M25		2 x M32	-	
Knob position		Open - OFF position  Close - ON position 					

Auxiliary Contacts


TECHNICAL DATA	
Type: Auxiliary Contacts NO or NC	Thermal current in Air (Ith): 16 A
Rated insulation voltage (Ui): 400 V	Thermal current in Boxes (Ithe): 10A
Conditional short circuit current (Icc - 400 V): 1 kA	Rated impulse withstand voltage (Uimp): 4 kV
Associated fuse size for conditional short circuit current - Type gG: 6A	Category of uses AC15: 6A (230V)
Tightening torque: 0,8 Nm	3A (380V)

70 RT HP


Dimension tables 16 A ÷ 160 A 2P, 3P, 3P+N, 4P

ISOLATORS IN PLASTIC BOX


ISOLATORS IN BOX 16 A ÷ 40 A

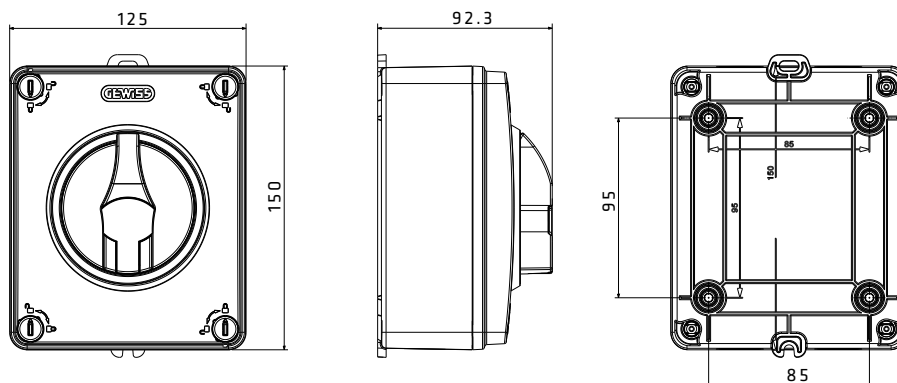

ISOLATORS IN BOX 63 A - 80 A

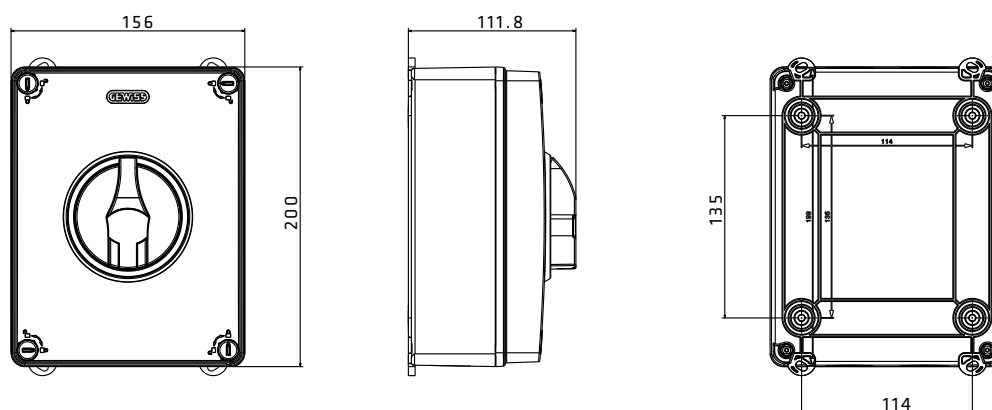


ISOLATORS IN BOX 100 A ÷ 160 A

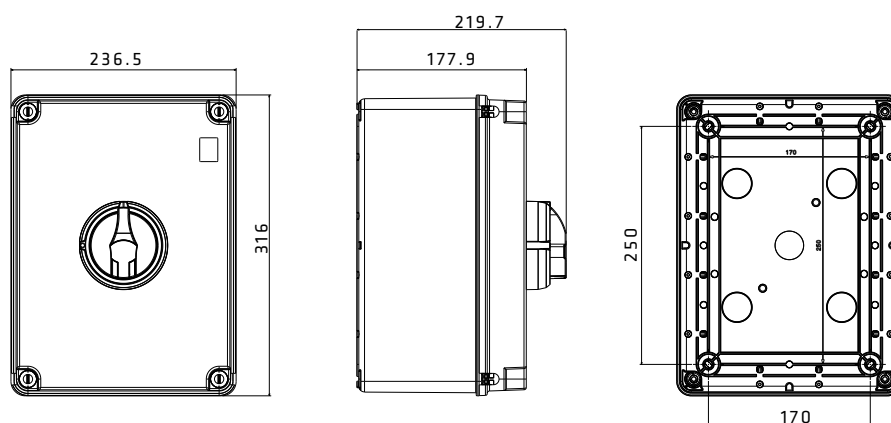


Dimension tables 16 A ÷ 100 A 6P, 8P

ISOLATORS IN PLASTIC BOX


ISOLATORS IN BOX 16 A ÷ 40 A 6P - 8P

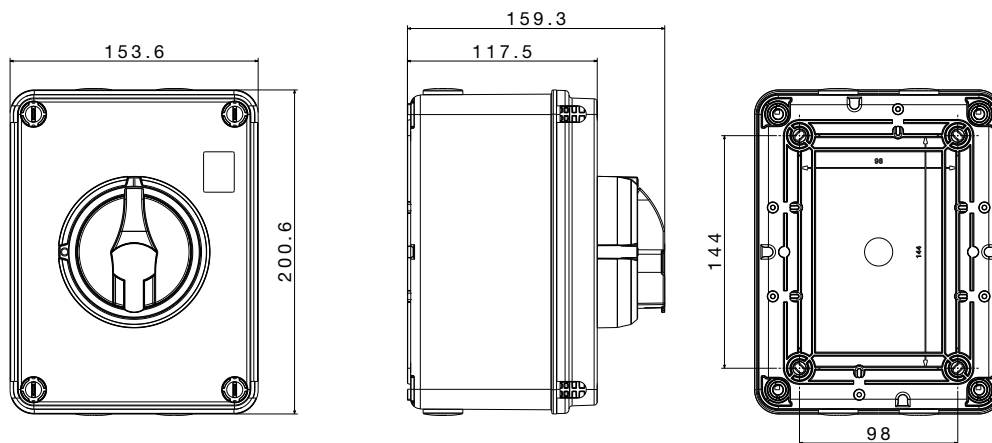

ISOLATORS IN BOX 63 A ÷ 100 A 6P

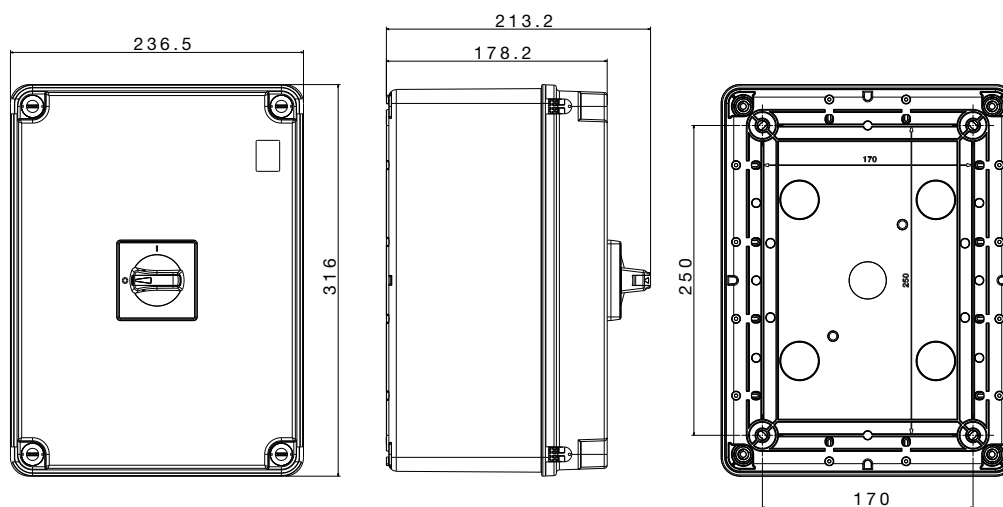

ISOLATORS IN BOX 63 A ÷ 100 A 8P

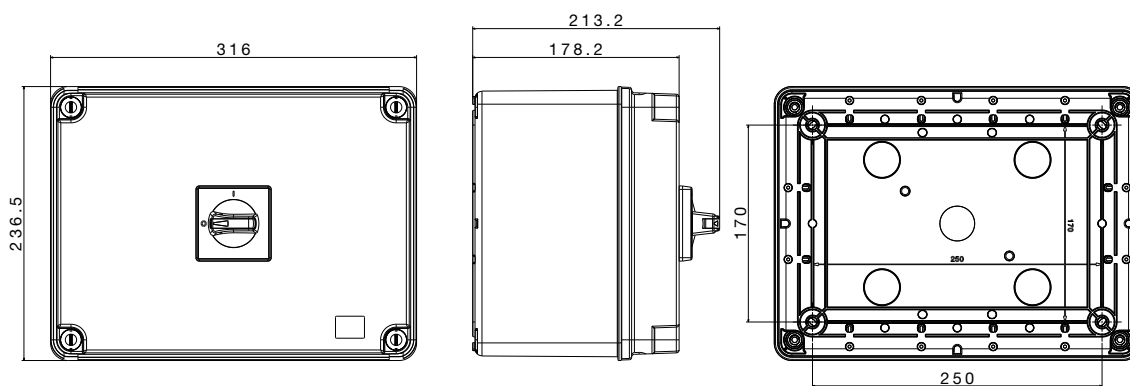

70 RT HP

ROTARY ISOLATOR SWITCHES IN METAL BOX

Rotary isolator switches in control (with black knob) or emergency version (with red knob). Complying with EN 60947-3 standard.

Electrical data 16 A ÷ 160 A 2P, 3P, 3P+N, 4P

Rated current IEC				16A	25A	32A	40A	63A	80A	100A	125A	160A	
Rated insulation voltage Ui			VAC	690	690	690	690	690	690	1000	1000	1000	
Rated impulse withstand voltage Uimp			kV	4	4	4	4	4	4	8	8	8	
Thermal current Ith/Ithe			A	16	25	32	40	63	80	100	125	160	
Rated operational current IEC	AC21A Resistive loads, including moderate overloads	415V	A	16	25	32	40	63	80	100	125	160	
	AC22A Mixed resistive and inductive loads, including moderate overloads	415V	A	16	25	32	40	63	80	100	125	125	
	AC23A Switching of motor loads or other highly inductive loads (3 phases/3 poles)	415V	A	16	25	32	40	63	80	100	125	125	
			A	160	250	320	400	630	800	2500	2500	2500	
Associated fuse for conditional short circuit current - Type gG			415V	kA	10	10	10	10	6	6	10	10	10
Conditional short circuit current (Icc)			500V		6	6	6	6	6	6	6	6	6
Associated fuse for conditional short circuit current - Type gG			A	16	25	32	40	63	80	100	125	160	160
WIRING *													
Tightening torque			Nm	1				3		6			
Max. flexible wire			mm²	1 ÷ 10				2,5 ÷ 25		4 ÷ 70			
Max. rigid wire			mm²	1 ÷ 10				2,5 ÷ 25		4 ÷ 70			


* The surface of the wiring terminals is knurled to improve the grip of the stripped cable inserted into the terminal and to facilitate wiring operations.

Electrical data 16 A ÷ 100 A 6P, 8P

Rated current IEC				16A	25A	32A	40A	63A	100A
Rated insulation voltage Ui			VAC	1000	1000	1000	1000	1000	1000
Rated impulse withstand voltage Uimp			kV	8	8	8	8	8	8
Thermal current Ith/Ithe			A	16	25	32	40	63	100
Rated operational current IEC	AC21A Resistive loads, including moderate overloads	415V	A	16	25	32	40	63	100
	AC22A Mixed resistive and inductive loads, including moderate overloads	415V	A	16	25	32	40	63	100
	AC23A Switching of motor loads or other highly inductive loads (3 phases/3 poles)	415V	A	16	25	32	40	63	100
	Conditional short circuit current (Icc)	415V	kA	10	10	10	10	10	10
Associated fuse for conditional short circuit current - Type gG			A	40	40	40	40	100	100
WIRING *									
Tightening torque			Nm	2				6	
Max. flexible wire			mm²	0,75 ÷ 16				4 ÷ 70	
Max. rigid wire			mm²	0,75 ÷ 16				4 ÷ 70	



* The surface of the wiring terminals is knurled to improve the grip of the stripped cable inserted into the terminal and to facilitate wiring operations.

Wiring diagram

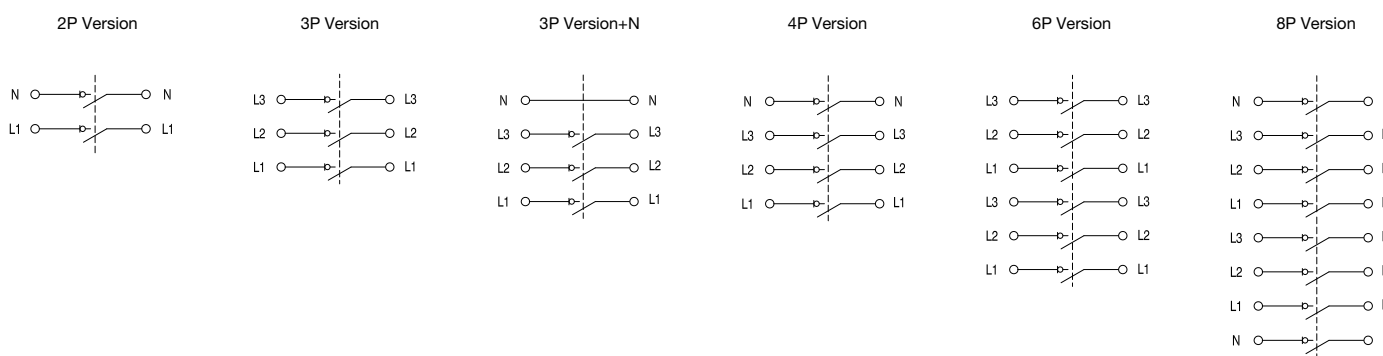



BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS										
Saline solution	Acids		Bases		Solventi				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Limited resistance	Limited resistance	Limited resistance	Limited resistance	Resistant	Resistant	Resistant	Resistant	Resistant	Resistant

Mechanical data 16 A ÷ 160 A 2P, 3P, 3P+N, 4P

In (A)		16	25	32	40	63	80	100	125	160
Poles	2P	x	x	x	x					
	3P	x	x	x	x	x	x	x	x	x
	3P+N	x	x	x	x	x	x	x	x	x
	4P	x	x	x	x	x	x	x	x	x
Degree of protection		IP66								
Impact resistance		IK10 (box); IK08 (knob)								
Thermo-pressure with ball (°C)		80 (box)								
Glow Wire Test (°C)		650 (knob)								
Range of temperature (°C)		-25; +60								
Housable auxiliary contacts		Max. 2 (1 per side)						Max. 4* (2 per side)		
Holes entry	Upper sides	2 x M20/M25				2 x M25/M32		-		
	Lower sides	2 x M20/M25				2 x M25/M32		-		
Knob position		Open - OFF position 		Close - ON position 		Open - OFF position 		Close - ON position 		

(*) In 4P versions the max number of auxiliary contacts that can be installed is 3 (2+1). In the 160A 4P version the maximum number of auxiliary contacts that can be installed is 1.

Mechanical data 16 A ÷ 100 A 6P, 8P


In (A)		16	25	32	40	63	100
Poles	6P	x	x	x	x	x	x
	8P	x	x	x	x	x	x
Degree of protection		IP66					
Impact resistance		IK10 (box); IK08 (knob)					
Thermo-pressure with ball (°C)		80 (box)					
Glow Wire Test (°C)		650 (knob)					
Range of temperature (°C)		-25; +60					
Housable auxiliary contacts	6P	Max. 4 (2 per side)					
	8P	Max. 2 (1 per side)				Max. 1	
Holes entry	Upper sides	2 x M20			2 x M25		-
	Lower sides	2 x M20			2 x M25		-
Knob position		Open - OFF position 		Close - ON position 			

Auxiliary Contacts

TECHNICAL DATA	
Type: Auxiliary Contacts NO or NC	Thermal current in Air (Ith): 16 A
Rated insulation voltage (Ui): 400 V	Thermal current in Boxes (Ithe): 10A
Conditional short circuit current (Icc - 400 V): 1 kA	Rated impulse withstand voltage (Uimp): 4 kV
Associated fuse size for conditional short circuit current - Type gG: 6A	Category of uses AC15: 6A (230V)
Tightening torque: 0,8 Nm	3A (380V)

70 RT HP


Dimension tables 16 A ÷ 160 A 2P, 3P, 3P+N, 4P

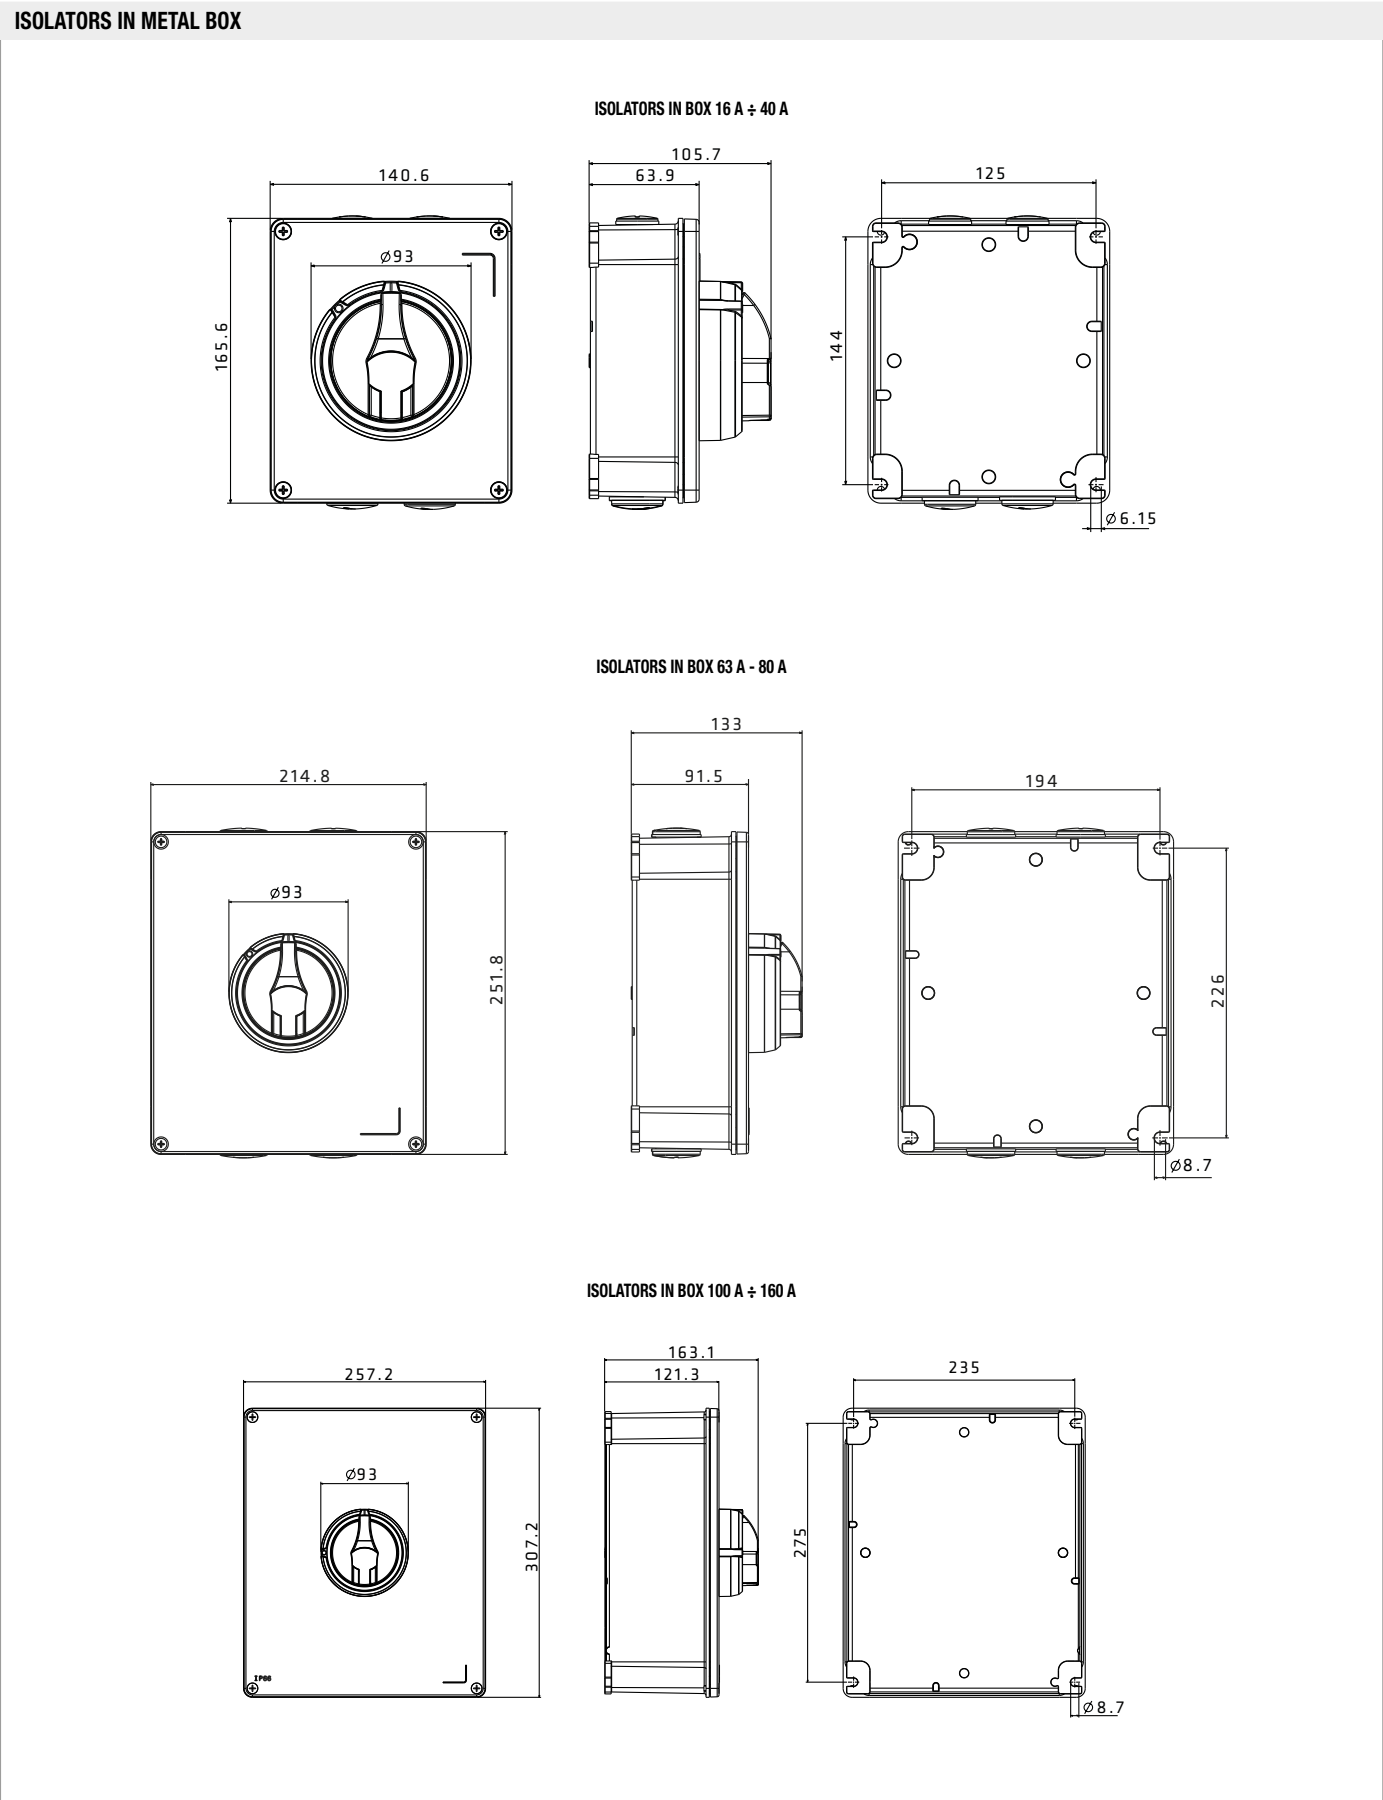


Dimension tables 16 A ÷ 100 A 6P, 8P

ISOLATORS IN METAL BOX

ISOLATORS IN BOX 16 A ÷ 40 A

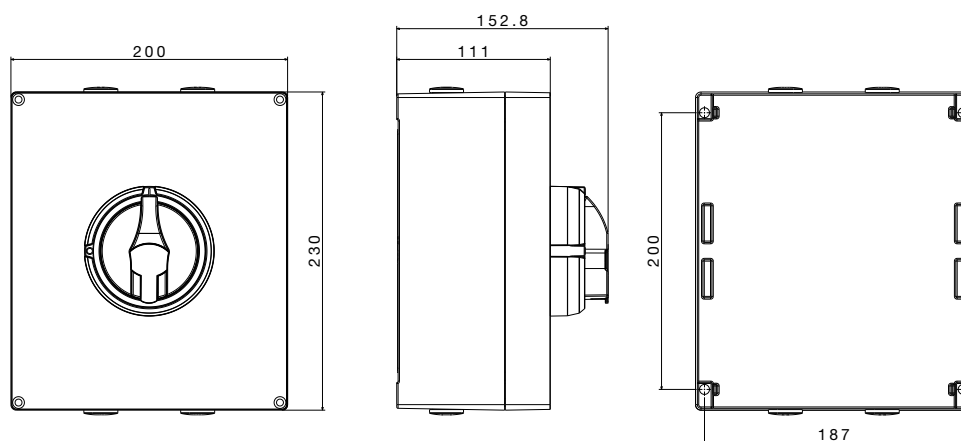

ISOLATORS IN BOX 63 A ÷ 100 A

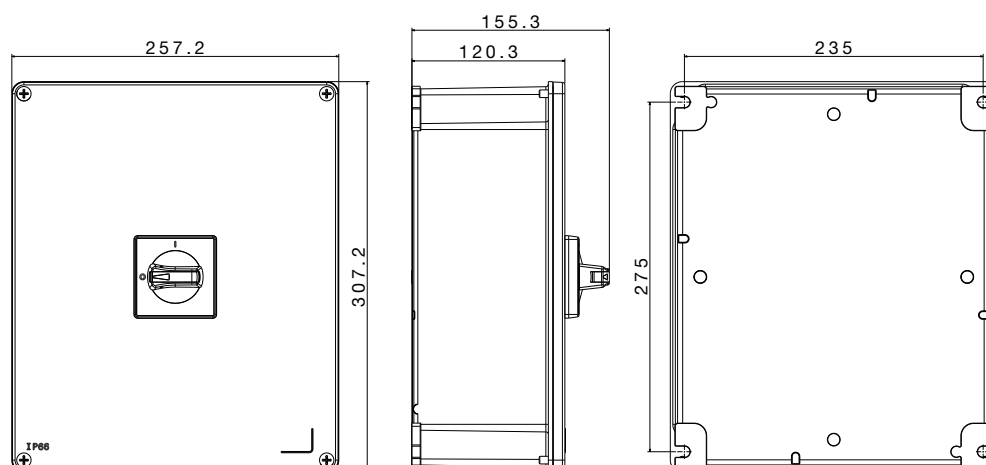

70 RT HP

ROTARY ISOLATOR SWITCHES IN DIRECT CURRENT



Rotary disconnecter switches in isolating box.

Complying with EN 60947-3 standard and CEI EN 60947-3:2021 (Annex D) for photovoltaic applications.

Electrical data


Code		GW 70 231	GW 70 235	GW 70 238	GW 70 239	GW 70 241	GW 70 242
Rated current IEC		16A	25A	32A	32A	40A	40A
DC21B / DCPV1	<800V	DATA TO BE REQUESTED TO OUR TECHNICAL ASSISTANCE SERVICE					
	1000V						
	1250V						
	1500V						
Rated insulation voltage Ui	VAC						
Rated impulse withstand voltage Uimp	kV						
Thermal current Ith/Ithe	A						
Rated short time withstand current Icw (1s)	A						
WIRING							
Tightening torque	Nm	1,6					
Max. flexible wire	mm²	1 ÷ 10					
Max. rigid wire	mm²	1 ÷ 10					

Mechanical data


In (A)			16	25	32		40	
Poles			2P	3P	3P	4P	3P	4P
Degree of protection			IP66/IP67/IP69					
Impact resistance			IK08					
Protection against indirect contact								
Thermo-pressure with ball (°C)			125 (device); 80 (box)					
Glow Wire Test (°C)			960 (device); 650 (box)					
Range of temperature (°C)			-25; +60					
Holes entry	Upper sides	2 x M20		2 x M20	2 x M25	2 x M20	2 x M25	
	Lower sides	2 x M20		2 x M20	2 x M25	2 x M20	2 x M25	
Knob position			Open - OFF position Close - ON position  					

Wiring diagram


2P Version



3P Version



4P Version




BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solventi				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Limited resistance	Resistant	Not Resistant	Limited resistance	Limited resistance	Not Resistant	Not Resistant	Limited resistance	Resistant	Resistant

Dimension tables

ISOLATORS IN BOX

ISOLATORS IN BOX 16 A ÷ 40 A

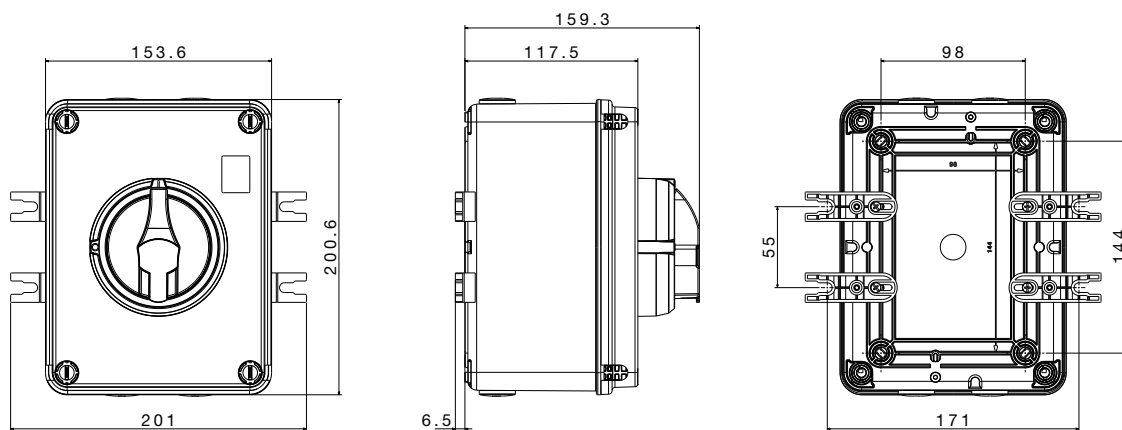

70 RT HP

ROTARY ISOLATOR SWITCHES FOR DISTRIBUTION BOARDS

Rotary disconnecter switches in versions for board (16 A ÷ 800 A) or for DIN rail (16 A ÷ 63 A). Complying with EN 60947-3 standard.

Electrical data 16 A ÷ 160 A 2P, 3P, 4P

Rated current IEC				16A	25A	32A	40A	63A	80A	100A	125A	160A	
Rated insulation voltage Ui			VAC	690	690	690	690	690	690	1000	1000	1000	
Rated impulse withstand voltage Uimp			kV	4	4	4	4	4	4	8	8	8	
Thermal current Ith/Ithe			A	16	25	32	40	63	80	100	125	160	
Rated operational current IEC	AC21A	415V	A	16	25	32	40	63	80	100	125	160	
	Resistive loads, including moderate overloads		500V	A	16	25	32	40	63	80	100	125	160
	AC22A	415V	A	16	25	32	40	63	80	100	125	125	
	Mixed resistive and inductive loads, including moderate overloads		500V	A	16	25	32	40	63	80	80	100	100
	AC23A	415V	A	16	25	32	40	63	80	100	125	125	
	Switching of motor loads or other highly inductive loads (3 phases/3 poles)		500V	A	16	25	32	40	63	80	80	100	100
Rated short time withstand current Icw (1s)			A	160	250	320	400	630	800	2500	2500	2500	
Conditional short circuit current (Icc)			415V	kA	10	10	10	10	6	6	10	10	10
			500V		6	6	6	6	6	6	6	6	6
Associated fuse for conditional short circuit current - Type gG			A	16	25	32	40	63	80	100	125	160	
WIRING													
Tightening torque			Nm	1				3		6			
Max. flexible wire			mm ²	1 ÷ 10				2,5 ÷ 25		4 ÷ 70			
Max. rigid wire			mm ²	1 ÷ 10				2,5 ÷ 25		4 ÷ 70			


NOTE: the surface of the wiring terminals is knurled to improve the grip of the stripped cable inserted into the terminal and to facilitate wiring operations.

Electrical data 200 A ÷ 800 A 3P, 4P

Rated current IEC				200A	250A	315A	400A	630A	800A
Rated insulation voltage Ui			VAC	1000	1000	1000	1000	1000	1000
Rated impulse withstand voltage Uimp			kV	12	12	12	12	12	12
Thermal current Ith/Ithe			A	200	250	315	400	630	800
Rated operational current IEC	AC21A Resistive loads, including moderate overloads	415V	A	200	250	315	400	630	800
		500V	A	200	250	315	400	630	800
		690V	A	200	250	315	400	630	800
	AC22A Mixed resistive and inductive loads, including moderate overloads	415V	A	200	250	315	400	630	800
		500V	A	200	250	315	400	630	800
		690V	A	200	250	315	400	630	800
	AC23A Switching of motor loads or other highly inductive loads (3 phases/3 poles)	415V	A	200	250	315	400	630	800
		500V	A	200	250	315	400	630	800
		690V	A	200	250	315	400	630	800
	Rated short time withstand current Icw (1s)			kA	6	6	12,5	12,5	20
Conditional short circuit current (Icc)		415V	kA	100	100	80	80	DATA TO BE REQUESTED TO OUR TECHNICAL ASSISTANCE SERVICE	
		500V	kA	100	100	80	80		
		690V	kA	100	100	80	80		
Associated fuse for conditional short circuit current - Type gG			A	200	250	315	400		
WIRING									
Tightening torque		Nm	22			37		75	
Max. flexible wire		mm²	70 ÷ 185			1 x 185 ÷ 2 x 185		2 x 185	
Max. rigid wire		mm²	70 ÷ 185			1 x 185 ÷ 2 x 185		2 x 240	

NOTE: for versions from 200 ÷ 800A for applications with voltages ≥500V the phase barriers are required.

Wiring diagram

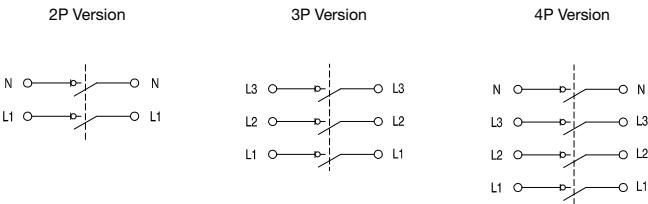

Auxiliary Contacts 16 A ÷ 160 A

TECHNICAL DATA	
Type: Auxiliary Contacts NA o NC	Thermal current in Air (Ith): 16 A
Rated insulation voltage (Ui): 400 V	Thermal current in Boxes (Ithe): 10A
Conditional short circuit current (Icc - 400 V): 1 kA	Rated impulse withstand voltage (Uimp): 4 kV
Associated fuse size for conditional short circuit current - Type gG: 6A	Category of use AC15: 6A (230V)
Tightening torque: 0,8 Nm	3A (380V)


Auxiliary Contacts 200 A ÷ 800 A

TECHNICAL DATA	
Type: Auxiliary Contacts EB or NC	Thermal current in Air (Ith): 16 A
Rated insulation voltage (Ui): 690 V	Rated impulse withstand voltage (Uimp): 6 kV
Conditional short circuit current (Icc - 690 V): 1 kA	Category of use AC15: 6A (230V)
Associated fuse size for conditional short circuit current - Type gG: 10A	3A (380V)

70 RT HP

Dimension tables


ROTARY ISOLATOR SWITCHES FOR BOARD: PANEL/DOOR MOUNTING 16 A ÷ 80 A

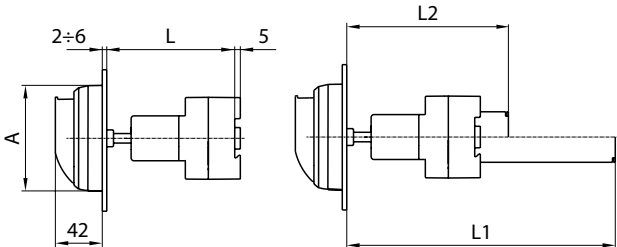


Isolator	WITHOUT BRACKETS		WITH BRACKETS		A
	Supplied with L	Adjustable up to L*	L1 max length obt.	L2 min length obt.**	
16A - 25A - 32A - 40A	145	87	(145+160) 305	(87+30) 117	ø 94
63A - 80A	177	114	(117+160) 337	(114+30) 144	ø 94

(*) Position obtainable by cutting the shaft supplied.
(**) Position obtainable by cutting both the shaft supplied, and the brackets, in the points shown.

ROTARY ISOLATOR SWITCHES FOR BOARD: PANEL/DOOR MOUNTING 100 A ÷ 160 A

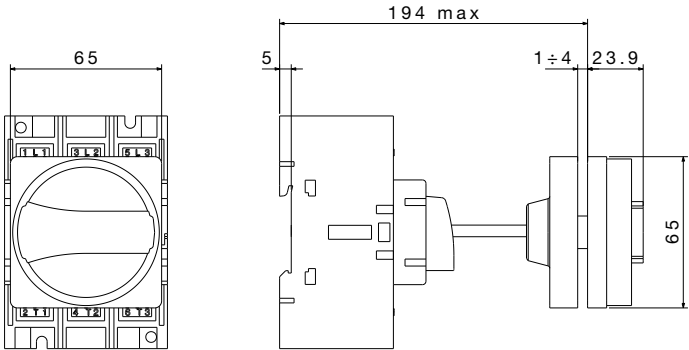

ROTARY ISOLATOR SWITCHES FOR BOARD: DIN RAIL MOUNTING EN 50022 16 A ÷ 63 A

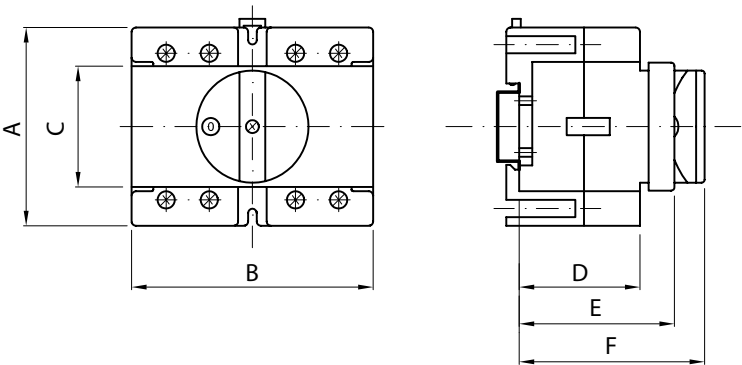


Type	A	B	C	D	E	F
16 - 32A	55	71 ●	45	37	53	68
63 A	73	89 ▲	45	44	56	68


★Occupies 3 modules (17,5 mm). ●Occupies 4 modules (17,5 mm). ▲Occupies 5 modules (17,5 mm).

Dimension tables

AUXILIARY CONTACTS 16 A ÷ 160 A

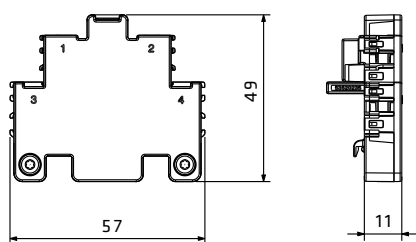


For isolator 16 - 25 - 32 - 40 - 63 - 80A




For isolator 100 - 125 - 160A and 16-100A 6P e 8P


ROTARY ISOLATOR SWITCHES FOR BOARD: PANEL/DOOR MOUNTING 200 A - 250 A






3P






4P



ROTARY ISOLATOR SWITCHES FOR BOARD: PANEL/DOOR MOUNTING 315 A - 400 A






ROTARY ISOLATOR SWITCHES FOR BOARD: PANEL/DOOR MOUNTING 630 A - 800 A



70 RT HP

Dimension tables

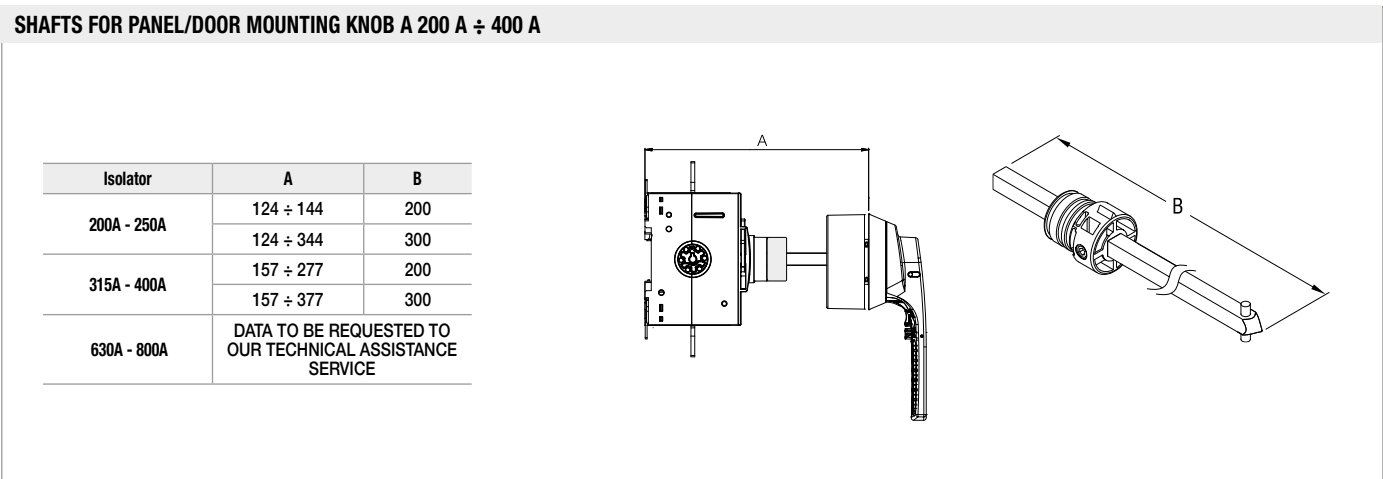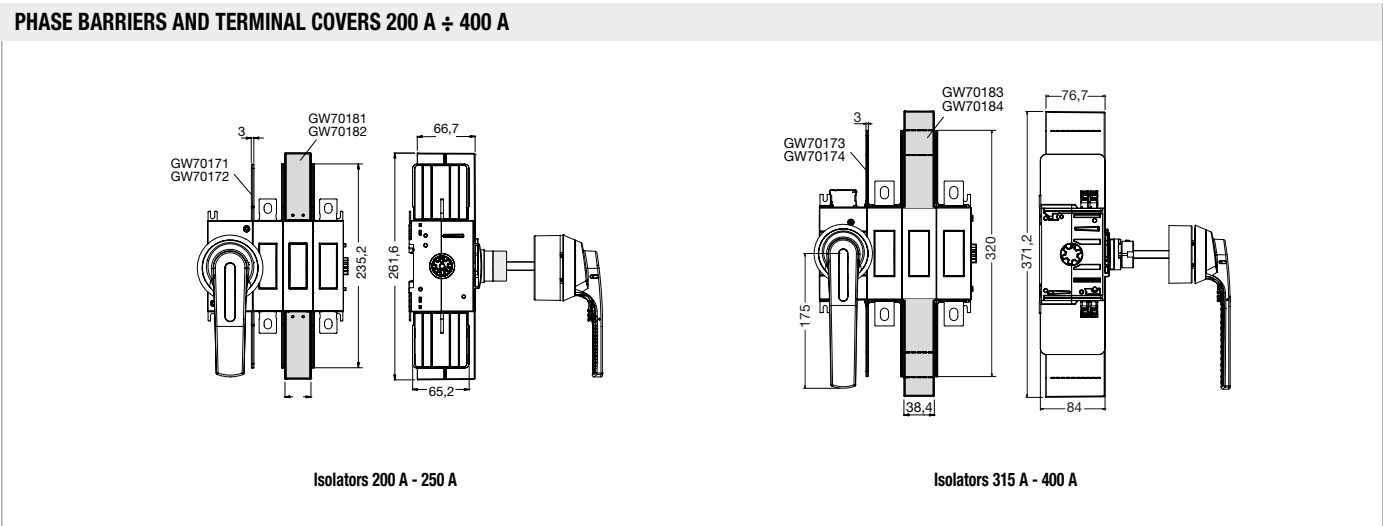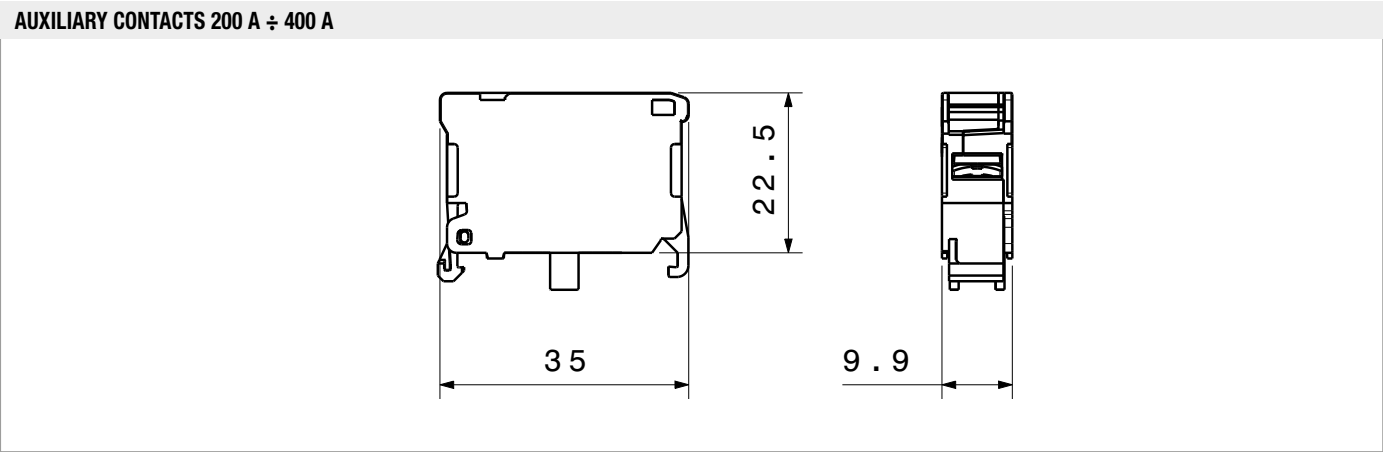


70 RT ATEX DISCONNECTORS - METAL BOX

Switch disconnectors for command and emergency in aluminium box painted in Grey Ral 7037, suitable for use in **ZONE 22(D)** with rated current of 16-32-63-100A.
Standard: EN 60947-3, EN 61241-0, EN60079-0, EN60079-31 - Dir. ATEX 94/9/CE.

TECHNICAL DATA				16A	32A	63A	100A	
Vn insulation		Ui (IEC947-3)		V	800			
Vn of impulse withstand		Uimp (IEC947-3)		kV	8			
In thermal	In air	Ith (IEC947-3)		A	25	40	63	100
	In box	Ithe (IEC947-3)		A	16	32	63	95
In use	AC21A	Ie (IEC947-3)		400V	A	16	32	63
	AC22A		400V	A	16	32	63	95
Max power with three-phase motors	AC23A	IEC947-3	400V	kW	7	14	28	42
In short lifespan		Icw		A	400	800	1500	1500
In cond. of short-circuiting		IEC947-3		kAeff	10	10	15	15
CONNECTABLE SECTIONS								
Rigid cables		min-max		mm²	1,5-16	1,5-16	2,5-35	10-70
				AWG	16-6	16-6	14-3	8-00
Flexible cables		min-max		mm²	1,5-16	1,5-16	2,5-35	10-70
				AWG	16-6	16-6	14-3	8-00
CONDITIONS OF USE								
Ambient temperature	of storage			°C	-30; +70			
	of operation			°C	-25; +55			

Note: for the behaviour with chemical and atmospheric agents, contact SAT Customer Service (+ 39 035/946111).

Dimension tables

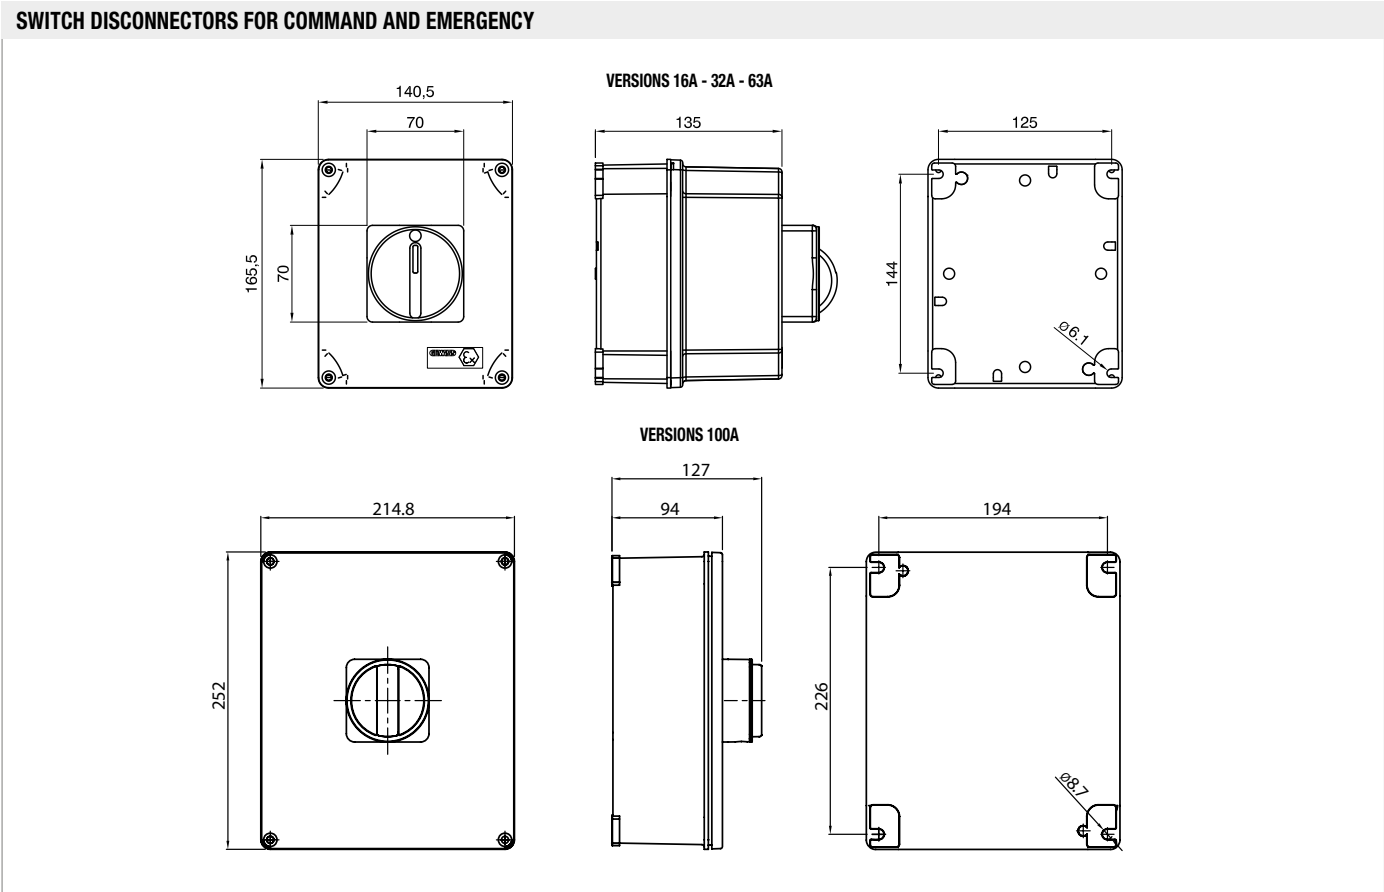



GEWISS S.p.A.

Registered Office: Via A. Volta, 1
24069 CENATE SOTTO BG - Italy
Tel. +39 035 946 111 - Fax +39 035 945 222
gewiss@gewiss.com - www.gewiss.com
Single shareholder company
Bergamo Business Register/VAT/Tax Code (IT) 00385040167
Economic and Administrative Index 107496
Share Capital 60,000,000.00 EUR fully paid up

Visita www.gewiss.com e seguici su:

